



1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	LJ.Zhang	DATE	12.03.2014	APPROVED	David

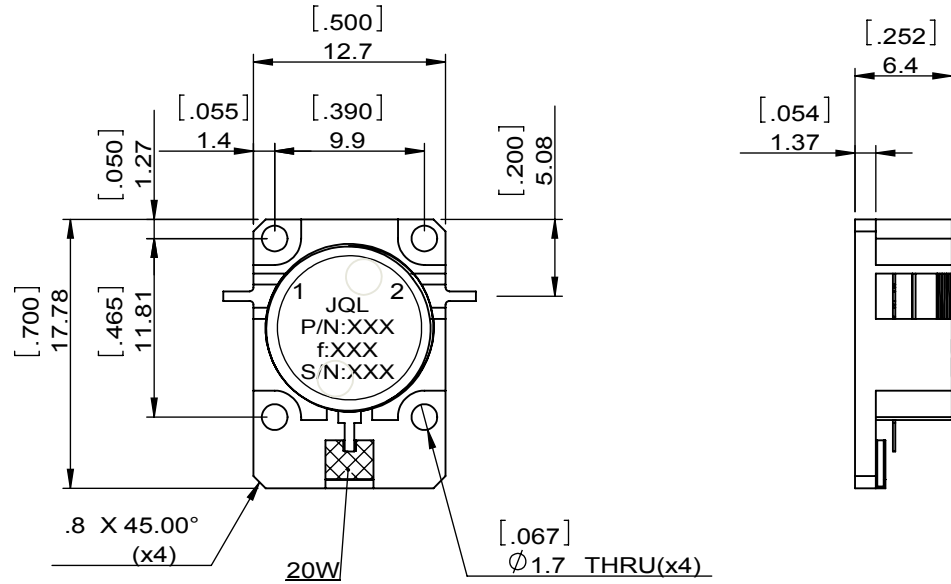

SPECIFICATIONS	
Part's Number	JID2191T2408VM2
Frequency(GHz)	2.191~2.408
Direction	CW
Insertion Loss(dB)MAX	0.45
Isolation(dB)MIN	19.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	20/10/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-65~+125
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	20/-
Tab(W×LG×THK)(mm[Inch])	0.635[.030]X1.9[.070]X0.15[.010] Tab to be .127[.005]thick copper flash gold over.025[.001]silver
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JID2191T2408VM2		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	LJ.Zhang	12.03.2014
DESCRIPTION: DROP-IN ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		2:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

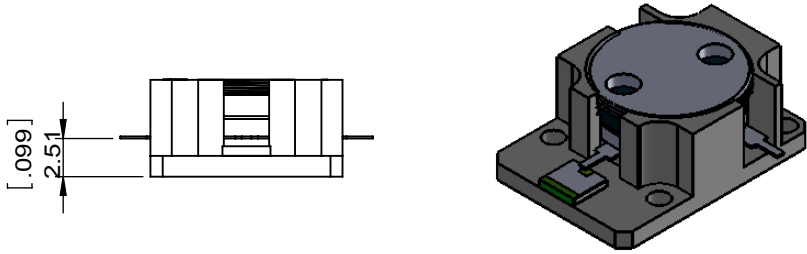

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.