



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	11.25.2014	David					

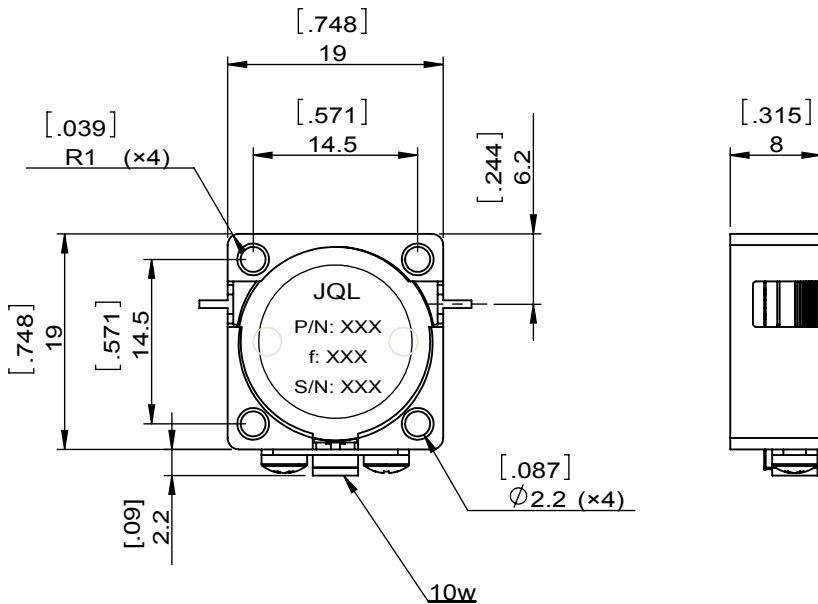

SPECIFICATIONS	
Part's Number	JID3400T3600SM1
Frequency(GHz)	3.400~3.600
Direction	CW
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	60/10/100
Operating Temperature( $^{\circ}$ C)	-
Storage Temperature( $^{\circ}$ C)	-40~85
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	10
Tab(W $\times$ LG $\times$ THK)(mm[Inch])	0.7[.027] $\times$ 2.5[.098] $\times$ 0.15[.006]-
Additional Notes	

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b> STEEL		<b>DWG NO:</b> JID3400T3600SM1		
<b>SURFACE TREATMENT:</b> NICKEL PLATING		DWG BY:	ZC.Wu	11.25.2014
<b>DESCRIPTION:</b> DROP-IN ISOLATOR		CHK'D BY:		SACLE
		APPV'D BY:		3:2
		Unit: mm[inch]	Tolerance: Liner: $\pm$ 0.25 Anguar: $\pm$ 0.5 $^{\circ}$	The First: 
				A4

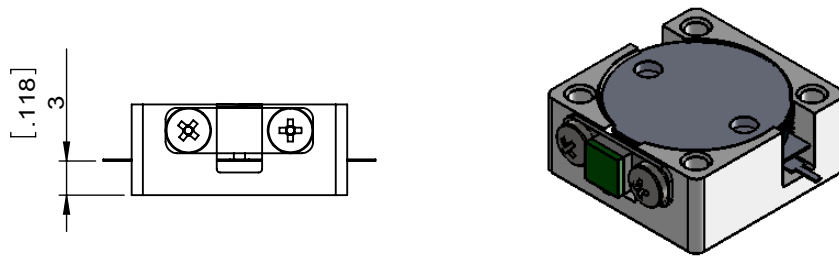

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.