


Ka Band Drop-In Isolator

JID34K0T36K0VM0

Description:

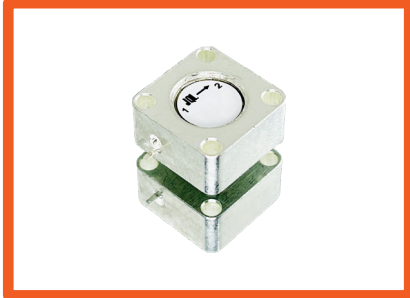


JID34K0T36K0VM0 is a drop-in isolator in the frequency 34.00~36.00GHz. The device is extremely stable over the temperature range of -20°C to +75°C, with maximum insertion loss of 1.5dB and minimum return loss of 17.7dB. It can handle Power FWD/REV/PK(Watt) of 0.5/-/-

Electrical Specification

Part Number	JID34K0T36K0VM0
Frequency (GHz)	34.000~36.000
Insertion Loss(dB)	1.5
Isolation(dB)MIN	18.0
Return Loss(dB)	17.7
Operating Temperature	-20°C~+75°C
Power FWD/REV/PK(Watt)	0.5/-/-
Tab(W×LG×THK)(mm[Inch])	0.64[0.025]x1.78[0.07]x0.13[0.005]


Outline

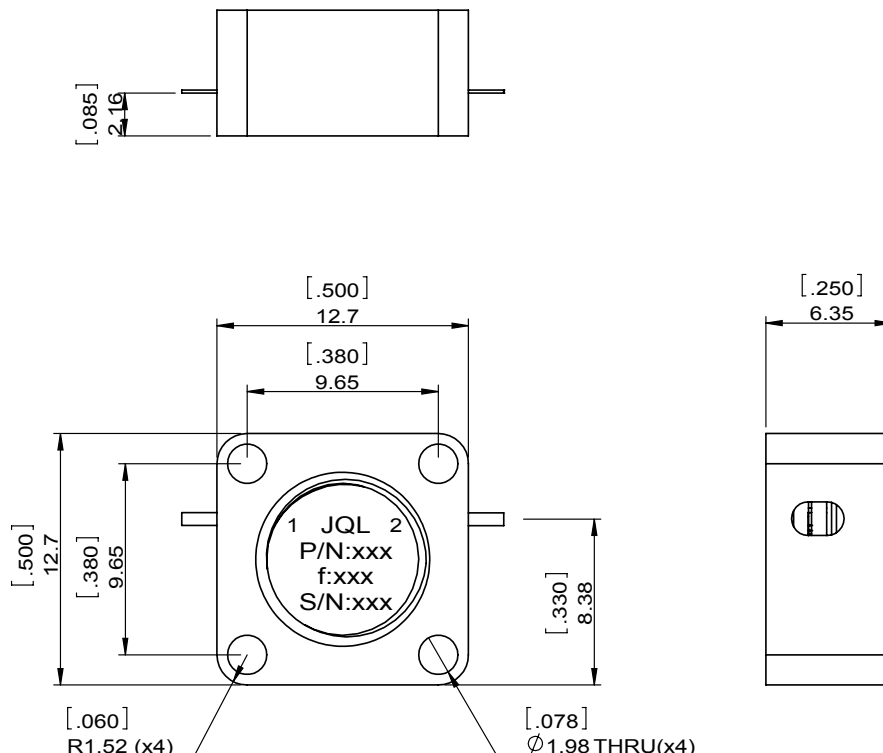

Ka Band Drop-In Isolator

JID34K0T36K0VM0

Test Data

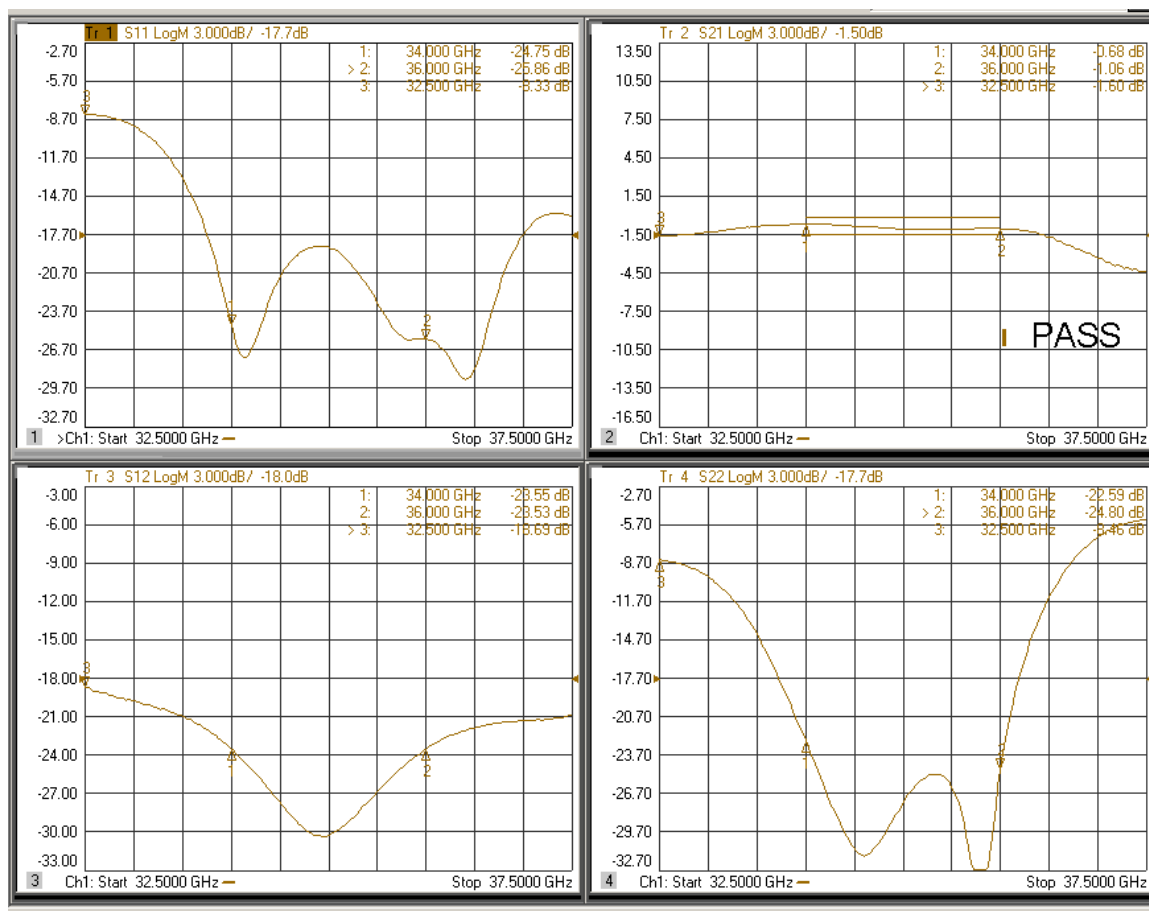

Applications

- Radar