
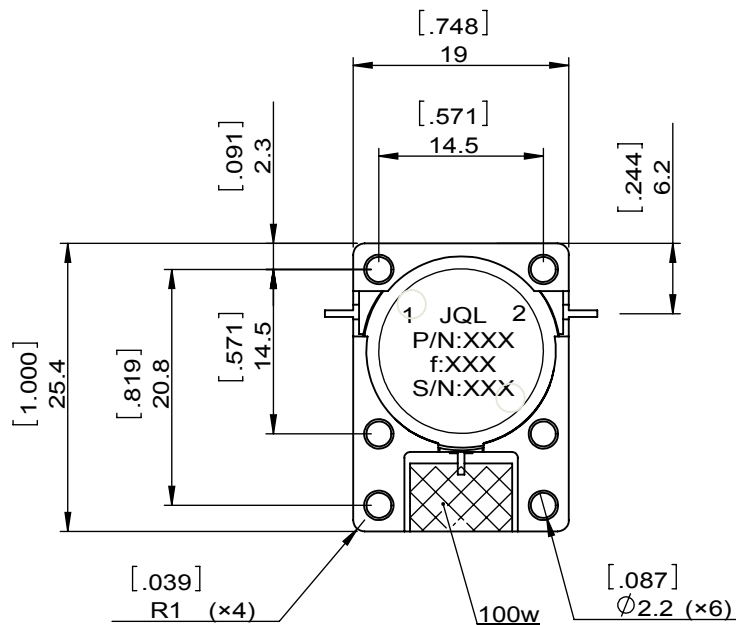
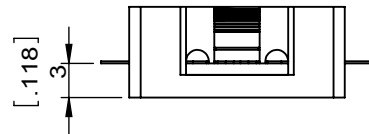


1	2
Document No.	QR4-700-T-003
REV.	A/0

3	4	5	6	
REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		ZC.Wu	08.07.2015	David

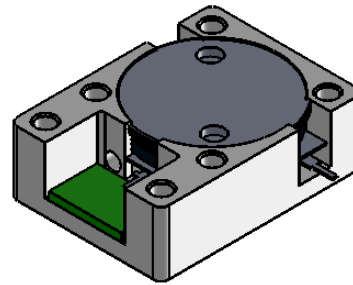

SPECIFICATIONS	
Part's Number	JID3600T4600SM7
Frequency(GHz)	3.600~4.600
Direction	CW
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	19.0
Vibration levels	20grms, over 20Hz to 2 KHz (Random) 20g, 10Hz to 100Hz (Sine)
Power FWD/REV/PK(Watt)	25/75/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	100
Tab(W×LG×THK)(mm[Inch])	0.60[.023]x2.5[0.098]x0.2[0.008]
Additional Notes	-

JQL JQL Electronic Inc					
MATERIAL: STEEL		DWG NO: JID3600T4600SM7			
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	ZC.Wu	08.07.2015	SCALE
DESCRIPTION: DROP-IN ISOLATOR		CHK'D BY:			1.5:1
		APPV'D BY:			
		Unit:	Tolerance:	The First:	A4
		mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.