


C Band Drop-In Isolator

JID4400T5200VM3

Description:

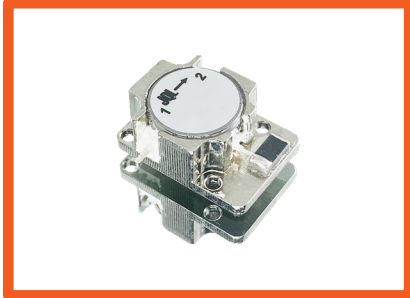


JID4400T5200VM3 is a drop-in isolator in the frequency 4.400~5.200GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.4dB and minimum return loss of 20.0dB. It has Power FWD/REV/P-K(Watt) of 25/25/-

Electrical Specification

Part Number	JID4400T5200VM3
Frequency (GHz)	4.400~5.200
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	23.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	25/25/-
Tab(W×LG×THK)(mm[Inch])	0.635[.030]X1.9[.070]X0.15[.010]


Outline

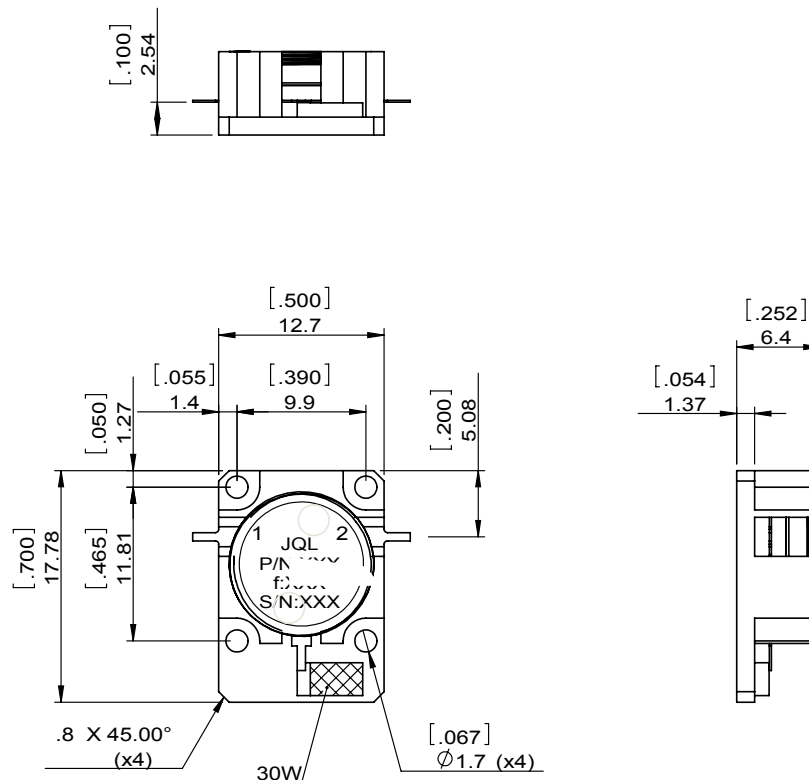

C Band Drop-In Isolator

JID4400T5200VM3

Test Data

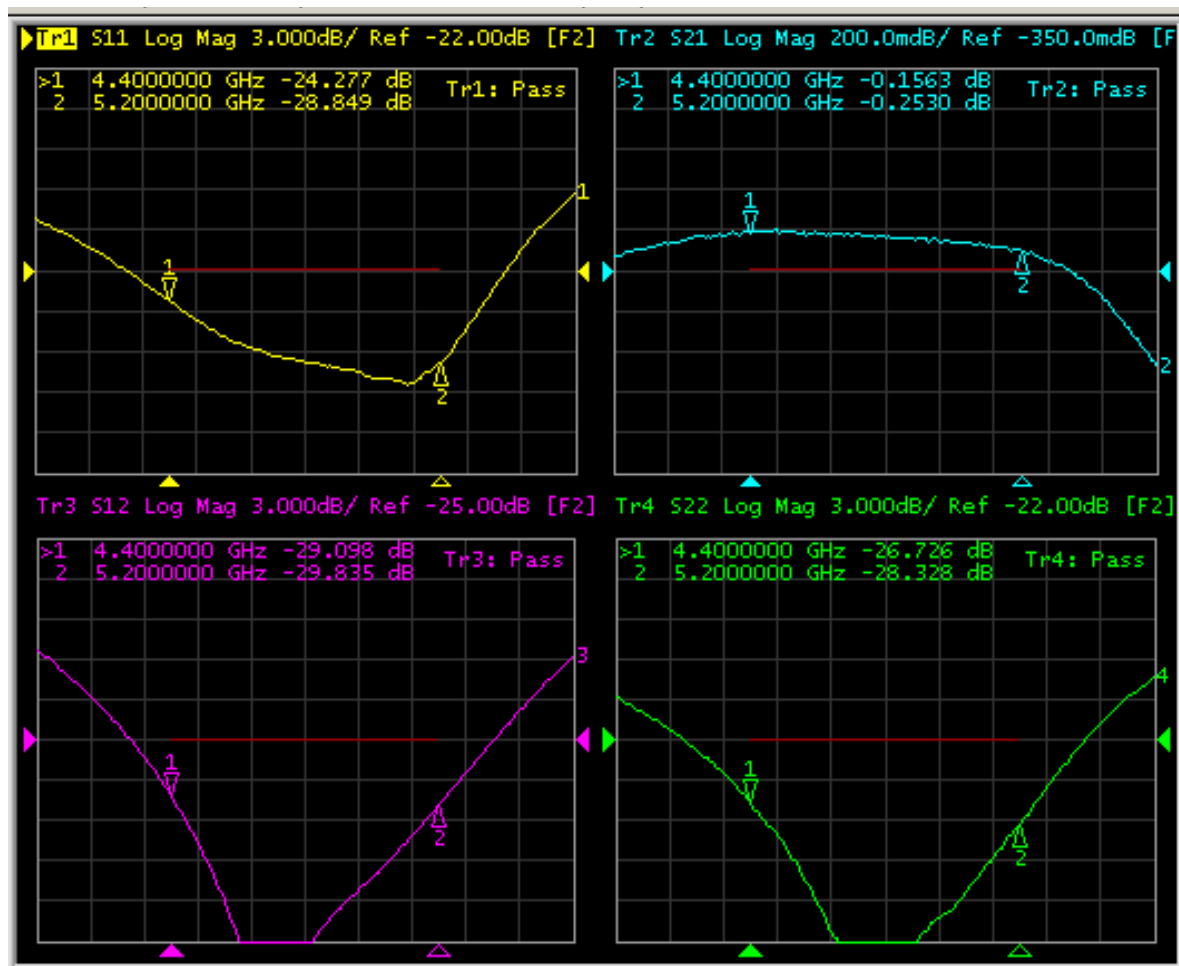

Applications

- Telecom