



| | | | | | | | | | | | |
|--------------|--|---------------|--|------|--|-------------|--|----------|--|------------|--|
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | |
| Document No. | | QR4-700-T-003 | | REV. | | DESCRIPTION | | REVISER | | DATE | |
| REV. | | A/0 | | 0 | | | | ZQ.Hou | | 10.15.2015 | |
| | | | | | | | | APPROVED | | David | |

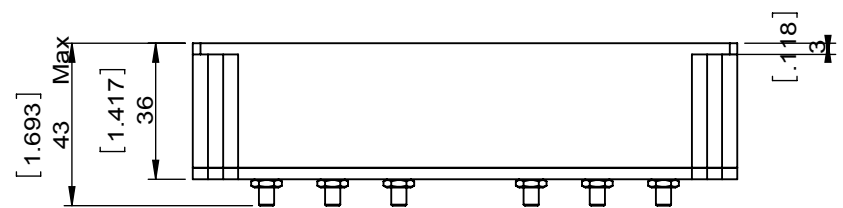

| ITEM | SPECIFICATIONS | |
|----------------------|---------------------|---------------------|
| Frequency range(MHz) | 1710~1785 | 1805~1880 |
| Insertion Loss(dB) | 1.0 Max | |
| Rejection(dBc) | 40 Min@1805~1880Mhz | 40 Min@1710~1785Mhz |
| Return Loss(dB) | 14Min | |
| Impedance(Ω) | 50 | |
| Power(W) | 50 Min CW | |
| Temperature(°C) | -40~+85 | |
| Connector | SMA FEMALE | |
| Notes | | |

| | | | | |
|--|--|--------------------------------------|---|----------------|
| JQL JQL Electronic Inc | | | | |
| MATERIAL: | | DWG NO: JFCD1710T1880SF-R1 | | |
| SURFACE TREATMENT: Painted black | | DWG BY: | ZQ.Hou | 10.15.2015 |
| DESCRIPTION: Diplexer | | CHK'D BY: | | SCALE |
| | | APPV'D BY: | | 1:2 |
| | | Unit: mm[inch] | Tolerance: Liner: ±0.25 Anguar: ±0.5° | The First: |
| | | | | A4 |

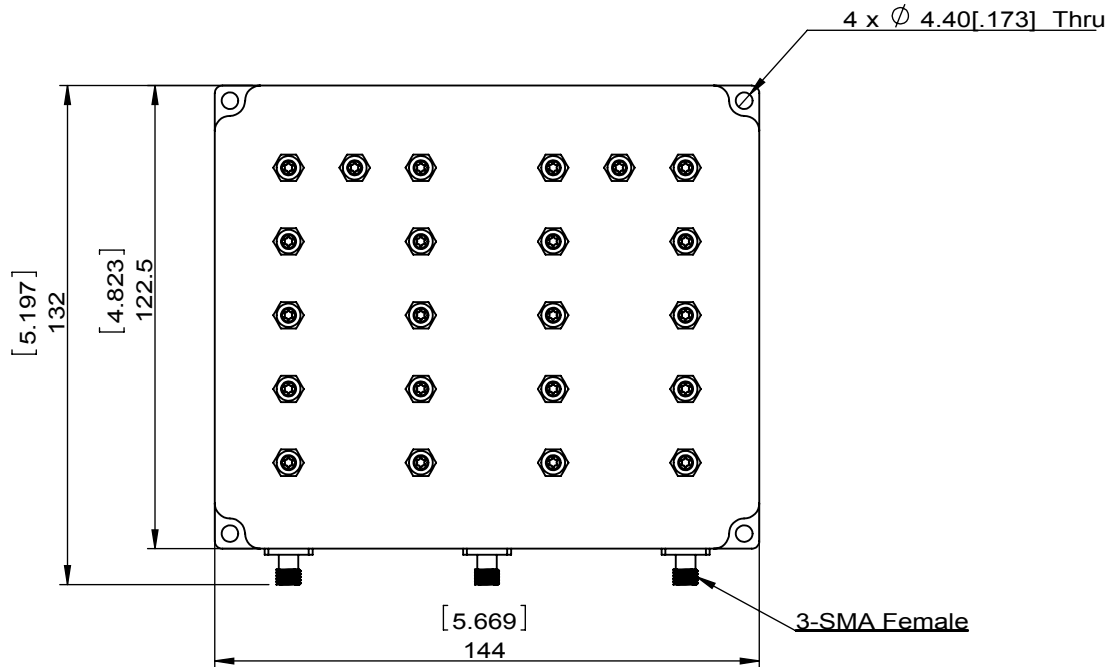

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.