

UHF Surface Mount Isolator

JIM0791T0821PN6

Description:




JIM0791T0821PN6 is a surface mount circulator in the frequency 0.791~0.821GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.25dB and minimum return loss of 22.0dB. It can handle a CW Power FWD/REV/P-K(Watt) of 150/60/-

Electrical Specification

Part Number	JIM0791T0821PN6
Frequency (GHz)	0.791~0.821
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	22.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	150/60/-


Outline

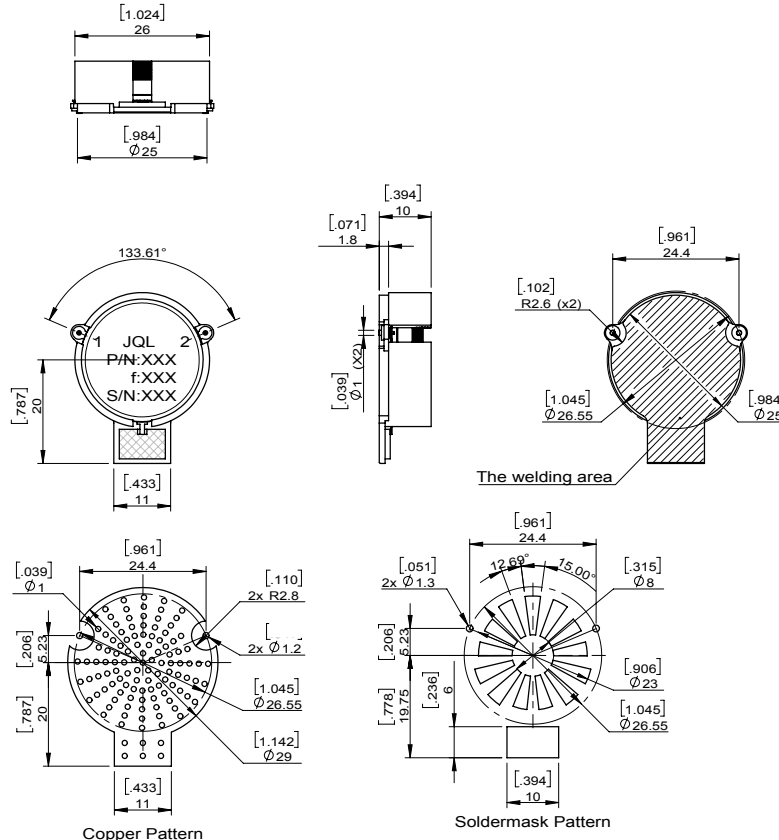

UHF Surface Mount Isolator

JIM0791T0821PN6

Test Data

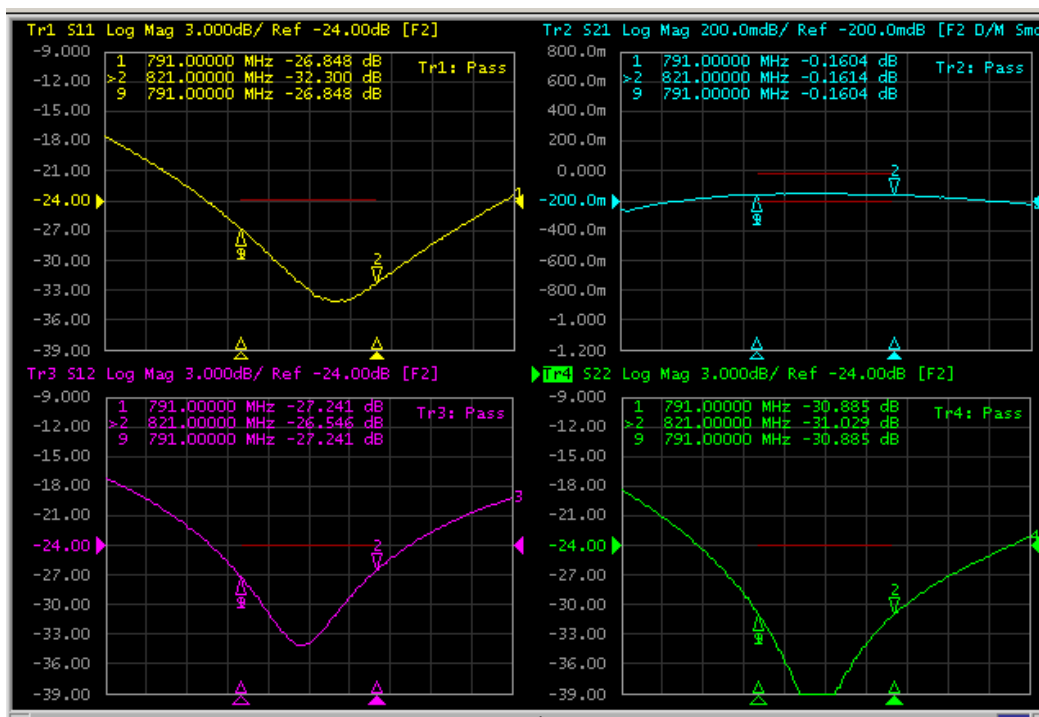

Applications

- Telecom