



5		6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVE

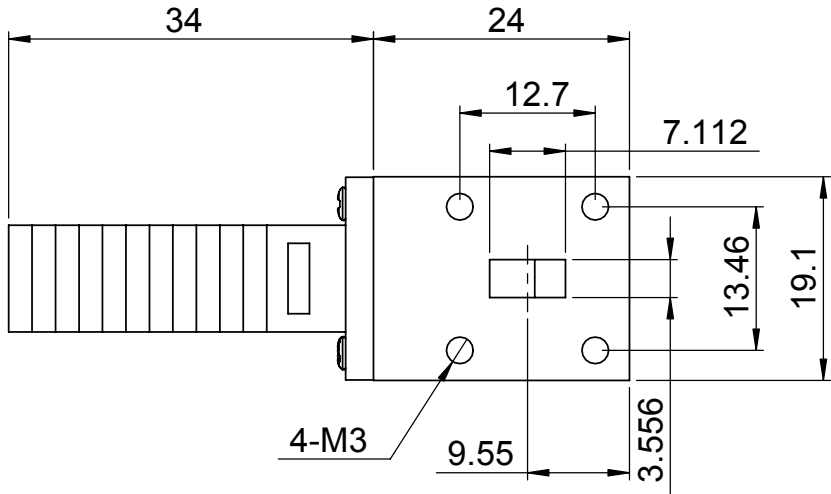

SPECIFICATIONS

P/N: JIWR28-21B-34K0T36K0-HP
 FREQ: 34~36GHz

ISOLATION: 20dB MIN
 INS LOSS: 0.5dB MAX
 VSWR: 1.2:1 MAX
 PWR: 10W AVG/100 PK
 WAVEGUIDE: WR28
 TEMP: -40C~+85C

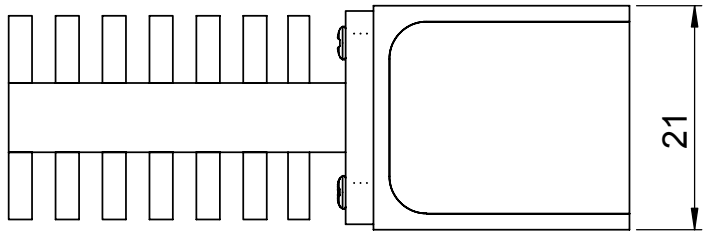

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc 500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA Tel : 1(888)236-9828 Fax: 1(630)823-2902

MATERIAL:	DWG NO.				
SURFACE TREATMENT:	JIWR28-21B-34K0T36K0-HP				
DESCRIPTION: WAVEGUIDE ISO	DWG BY:	NAME	DATE	SIGNATURE	REV:
	CHK'D BY:	SY			0
	APPV'D BY:	GC			
		JZ			
		TOLERANCE Liner: ±0.1mm Angular: ±0.5°	Q.A		A4