


5		6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVE

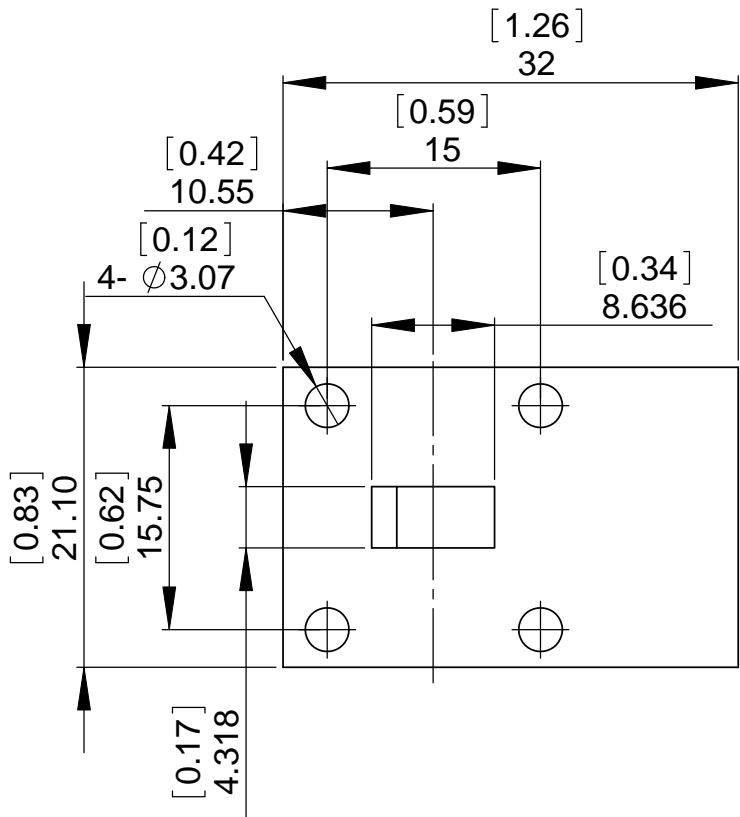

SPECIFICATIONS

P/N: JIWR34-12.7S-25K0T28K0
 FREQ: 25.0~28.0GHz

ISOLATION: 20dB MIN
 INS LOSS: 0.4dB MAX
 RETURN LOSS: 19dB MIN
 PWR: 1 W
 FLANGE: WR34
 TEMPERATURE OPERATING: -30C~+70C
 STORAGE: -40C~+85C

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc		500 Lake Cook Road, Suite 350 Deerfield, IL 60015, USA		Tel : 1(888)236-9828 Fax: 1(630)823-2902	
MATERIAL: ALUM		DWG NO. JIWR34-12.7S-25K0T27K0			
SURFACE TREATMENT:					
DESCRIPTION: WAVEGUIDE ISOLATOR		TOLERANCE Liner: ±0.1mm Angular: ±0.5°		Q.A A4	
		DWG BY: SY 07.01.09		REV:	
		CHK'D BY: GC 07.01.09			
		APPV'D BY: JZ 07.01.09			