


5		6		
REV.	DESCRIPTION	REVISOR	DATE	APPROVE

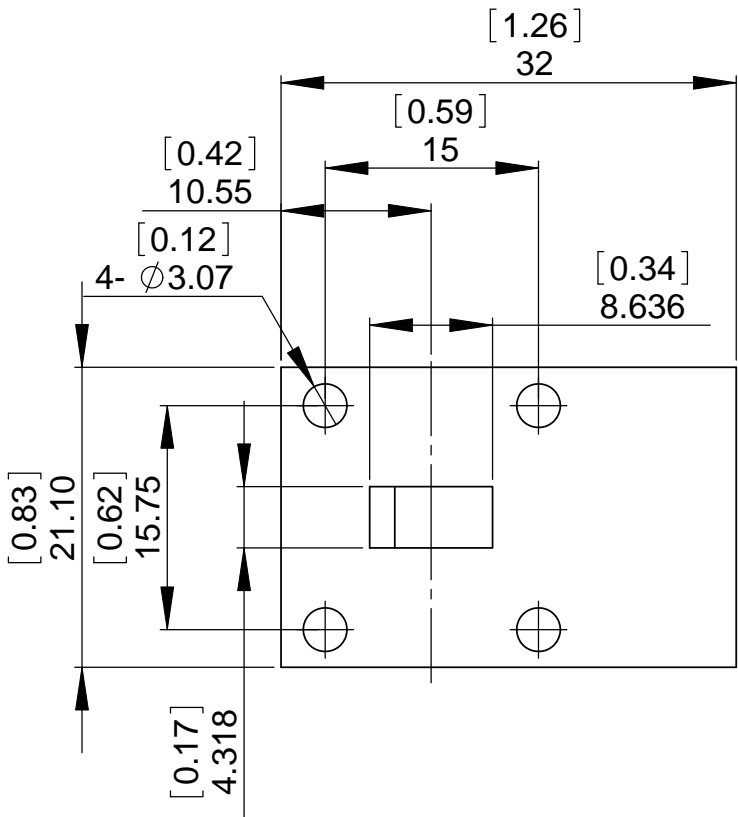

SPECIFICATIONS

P/N: JIWR34-12.7S-25K5T27K0
 FREQ: 25.50~27.00GHZ

ISOLATION: 20dB MIN
 INS LOSS: 0.40dB MAX
 RETURN LOSS: 20dB MIN
 PWR: 1 W
 FLANGE: WR34
 TEMPERATURE OPERATING: -30C~+70C
 STORAGE: -40C~+85C

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc 500 Lake Cook Road, Suite 350 Tel : 1(888)236-9828
 Deerfield, IL 60015, USA Fax: 1(630)823-2902

MATERIAL: ALUM	DWG NO. JIWR34-12.7S-25K5T27K0			
SURFACE TREATMENT:				
DESCRIPTION: WAVEGUIDE ISOLATOR	NAME	DATE	SIGNATURE	REV:
	DWG BY: SY	07.01.09		
	CHK'D BY: GC	07.01.09		
	APPV'D BY: JZ	07.01.09		
	TOLERANCE Liner: ±0.1mm Angular: ±0.5°		Q.A	A4