


REV.	DESCRIPTION	REVISOR	DATE	APPROVE

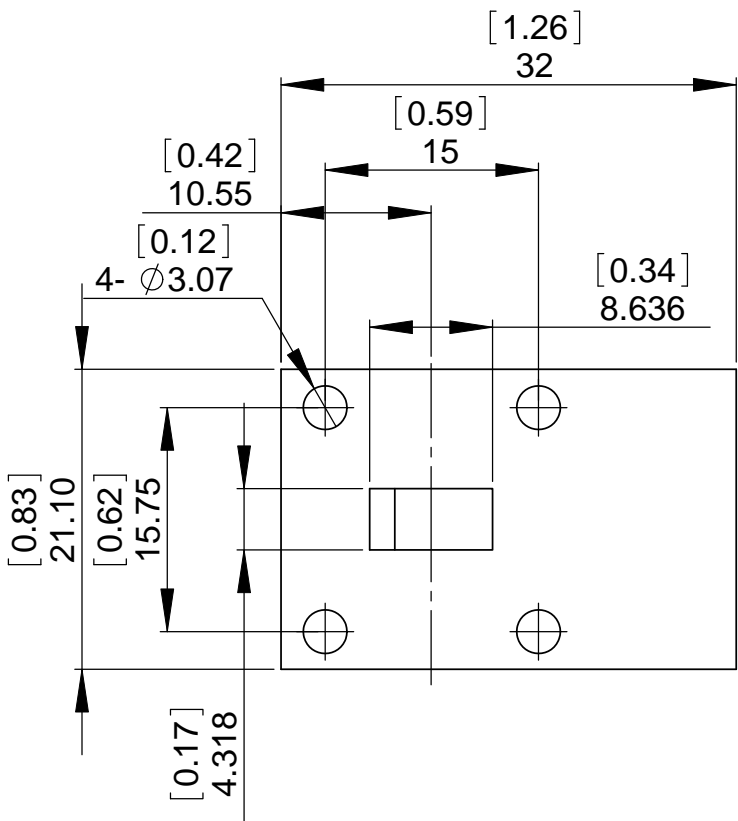

**SPECIFICATIONS**

P/N: JIWR34-12.7S-TBD  
 FREQ: 21.70~33.00GHz  
 Bandwidth Up To 30%

ISOLATION: 23dB MIN  
 INS LOSS: 0.25dB MAX  
 RETURN LOSS: 21dB MIN  
 PWR: 1 W  
 FLANGE: WR34  
 TEMPERATURE OPERATING: -30C~+70C  
 STORAGE: -40C~+85C

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

**JQL JQL Electronic Inc** 500 Lake Cook Road, Suite 350 Tel : 1(888)236-9828  
 Deerfield, IL 60015, USA Fax: 1(630)823-2902

MATERIAL: <b>ALUM</b>	DWG NO. <b>JIWR34-12.7S-TBD</b>			
SURFACE TREATMENT:				
DESCRIPTION: <b>WAVEGUIDE ISOLATOR</b>	NAME	DATE	SIGNATURE	REV:
	DWG BY: <b>SY</b>	<b>07.01.09</b>		
	CHK'D BY: <b>GC</b>	<b>07.01.09</b>		
	APPV'D BY: <b>JZ</b>	<b>07.01.09</b>		
	TOLERANCE		Q.A	A4
	Liner: ±0.1mm			
	Angular: ±0.5°			