



1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		DESCRIPTION	
REV. A/0								0		ZC.Wu	
								03.12.2015		APPROVED David	

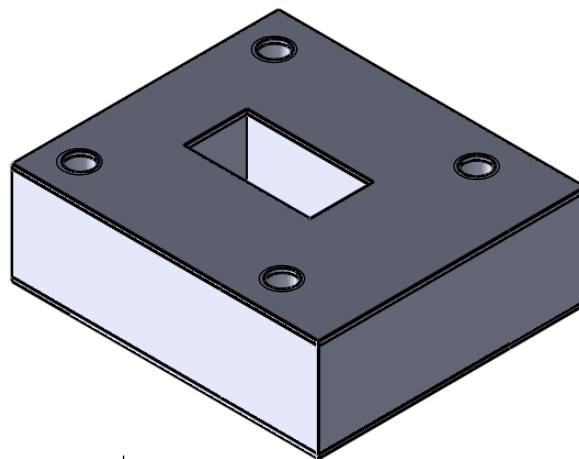

SPECIFICATIONS	
Part's Number	JIWR62-12.7D-17K3T18K1
Frequency(GHz)	17.30~18.10
Direction	-
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	19.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	10/5/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

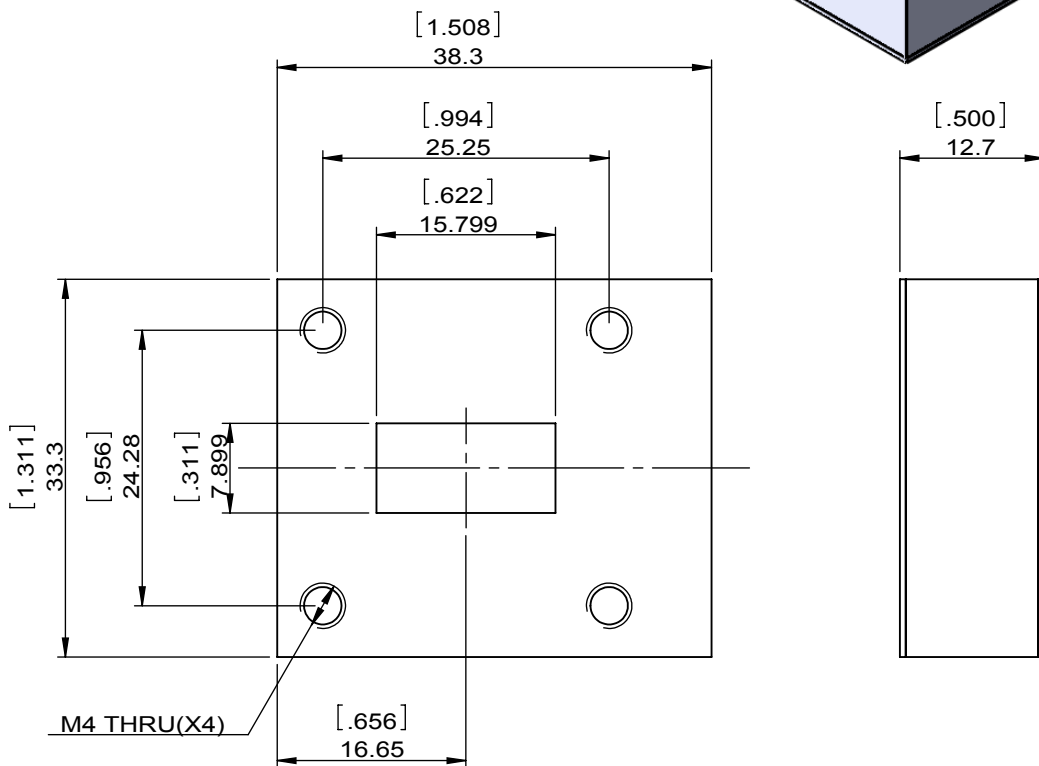

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b> AL		<b>DWG NO:</b> JIWR62-12.7D-17K3T18K1		
<b>SURFACE TREATMENT:</b> CHEM FILM		DWG BY:	ZC.Wu	03.12.2015
<b>DESCRIPTION:</b> WAVEGUIDE ISOLATOR		CHK'D BY:		SCALE
		APPV'D BY:		3:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.