



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZC.Wu	10.19.2015	David					

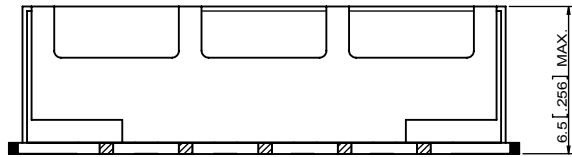


FRONT VIEW




TOLERANCE: ±0.20

UNIT: mm

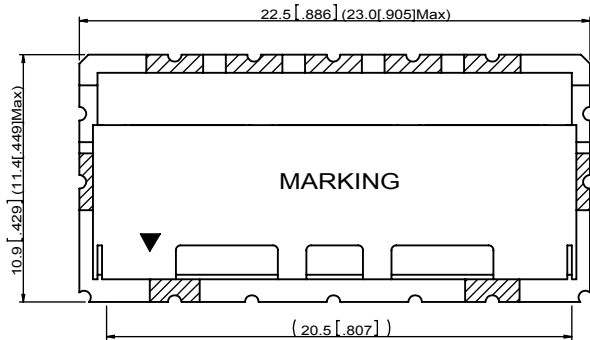

TOP VIEW

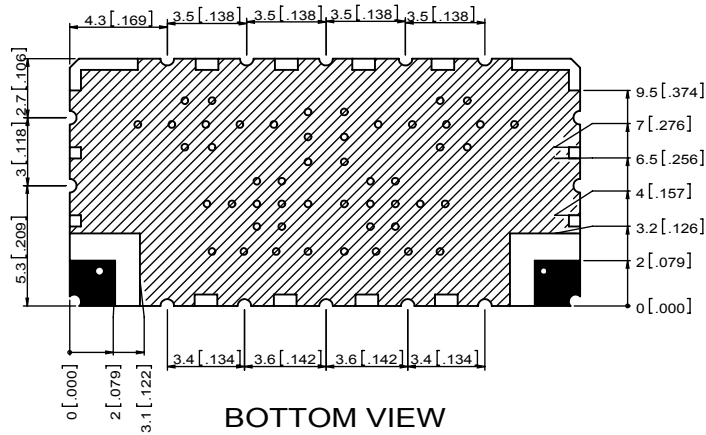

BOTTOM VIEW

ITEM	SPECIFICATIONS
Center Frequency(MHz)	2800
Bandwidth(MHz)	fo ±4.5 [2795.5~2804.5]
Insertion Loss(dB)	3.5 Max.
Ripple(dB)	0.5 Max
Return Loss(dB)	18.0 Min
Attenuation(dB) Absolute Value	50.0 Min @fo± [30.0~2675.0 MHz] 50.0 Min @fo± [2925.0~3055.0 MHz] 62.0 Min @fo± [3055.0~3065.0 MHz] 40.0Min @fo± [3065.0 ~ 3500MHz] Min @fo± [ ~ MHz] Min @fo± [ ~ MHz]
Input Power/Peak Power(Watt)	1.0
In/Out Impedance(Ω)	50
Operating Temperature(°C)	-40~+85
Additional Notes	-

**JQL** JQL Electronic Inc

<b>MATERIAL:</b>	<b>DWG NO:</b> JRP2800H6R09FA			
	<b>SURFACE TREATMENT:</b>	DWG BY: ZC.Wu	10.12.2015	SCALE
<b>DESCRIPTION:</b> FILTER	CHK'D BY:			3:1
	APPV'D BY:			
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.