

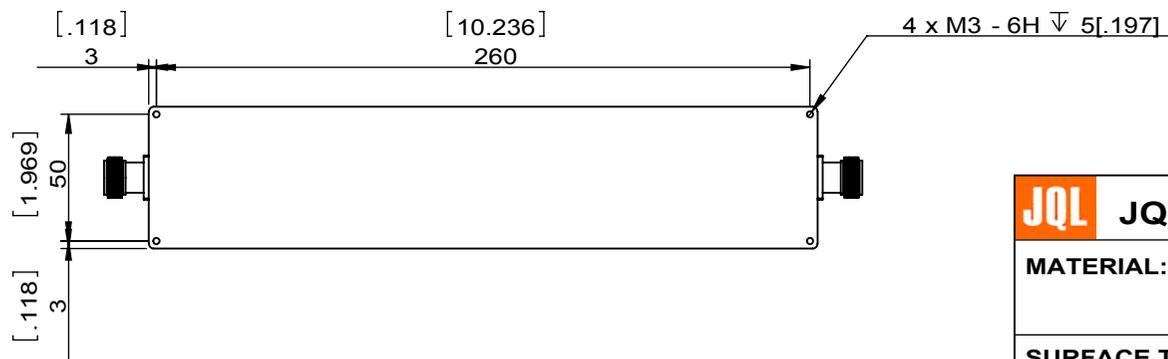


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISER	ZQ.Hou	DATE	11.12.2015	APPROVED	David

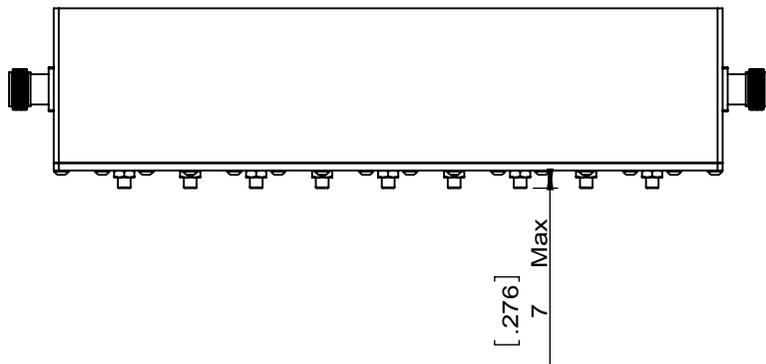


ITEM	SPECIFICATIONS
Frequency(MHz)	447.5~452.5
Bandwidth @3dB(MHz)	5
Insertion Loss(dB)	1.5 Max
Ripple(dB)	1 Max
Rejection(dB)	60 Min@420~425Mhz
Return Loss(dB)	20Min
Group delay(ns)	100 Max
Impedance(Ω)	50
Input Power(W)	10 Max
Temperature(°C)	-10~+70
Humidity	95% Non condensing
Connector	N FEMALE
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB0447T0453NF		
SURFACE TREATMENT: PAINTED BLACK		DWG BY:	ZQ.Hou	11.12.2015
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

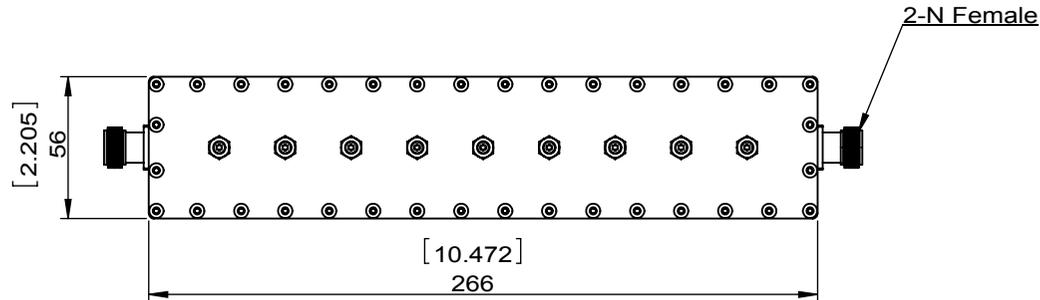

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISER	DATE	APPROVED			
				0		ZQ.Hou	11.12.2015	David			

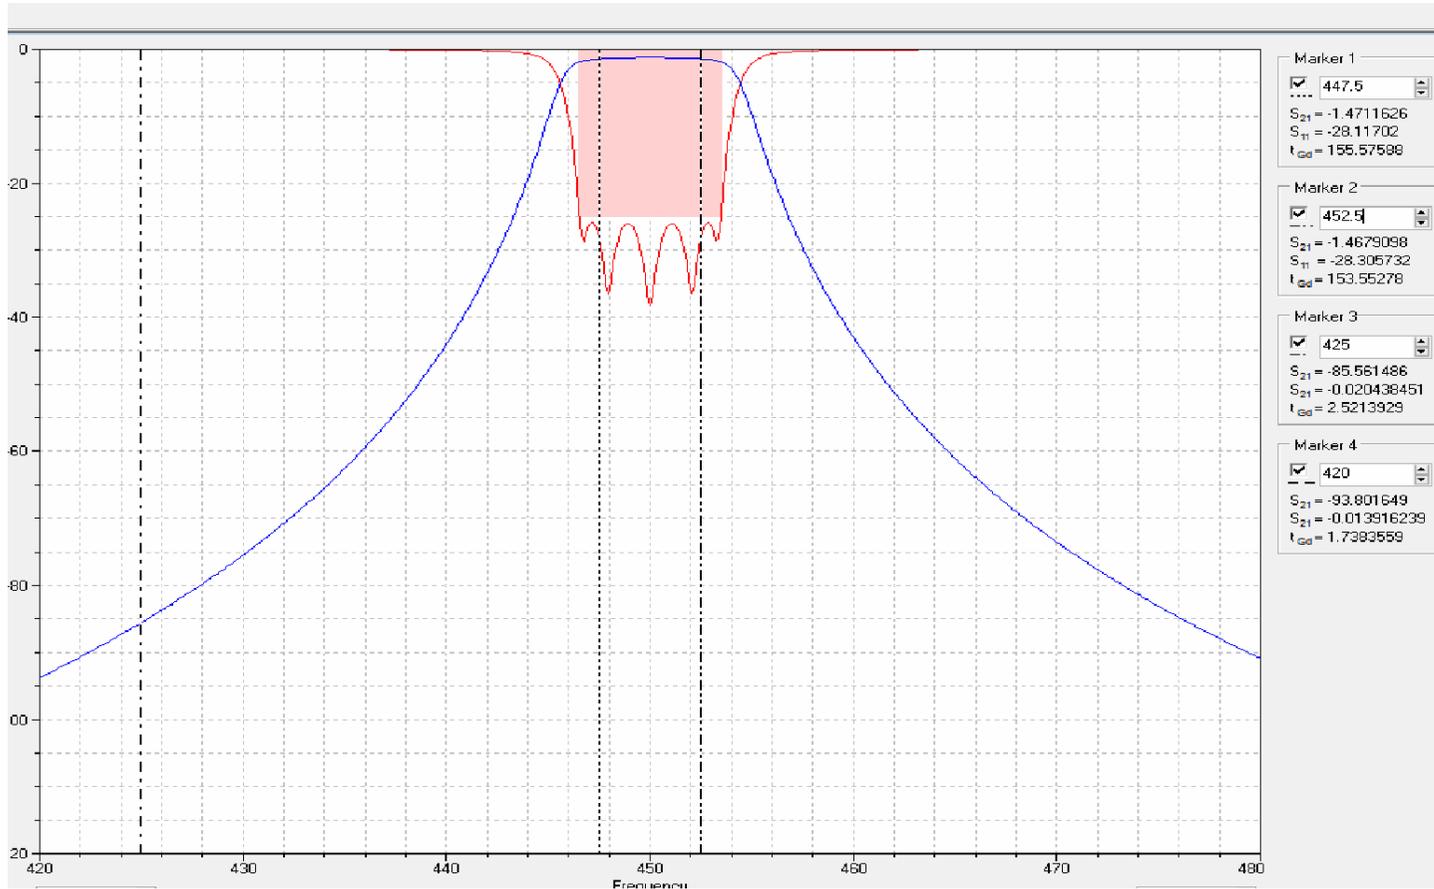

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB0447T0453NF		
SURFACE TREATMENT: PAINTED BLACK		DWG BY:	ZQ.Hou	11.12.2015
DESCRIPTION: FILTER		CHK'D BY:		SCALE
		APPV'D BY:		1:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.