

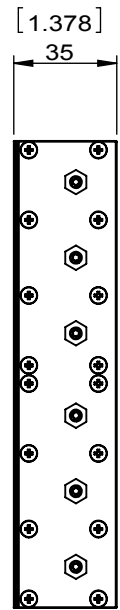


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		ZQ.H	11.13.2015	David					

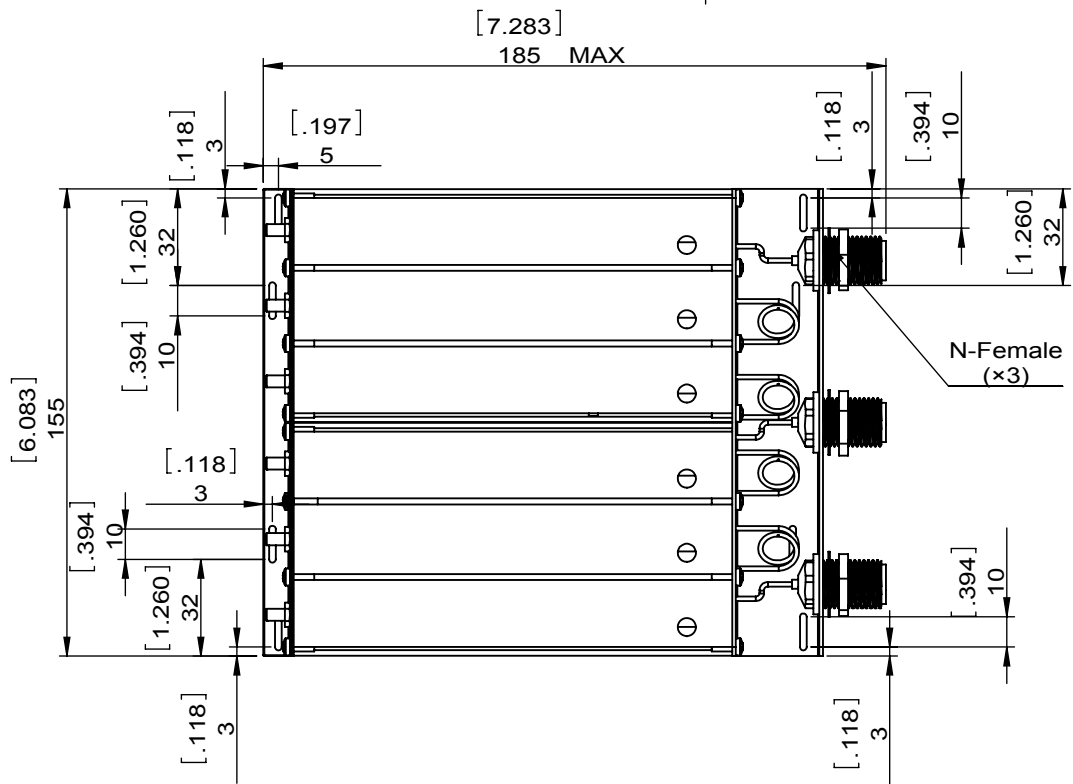

ITEM	SPECIFICATIONS		
Frequency(MHz)	380~440	430~480	470~520
Spacing(MHz)	10		
Insertion Loss(dB)	1.5 Max		
Return Loss(dB)	14 Min		
Isolation(dB)	65 Min		
Power Rating(W)	50		
Impedance(Ω)	50		
Temperature(°C)	-25 to +55		
Connector	N-Female		
Notes			

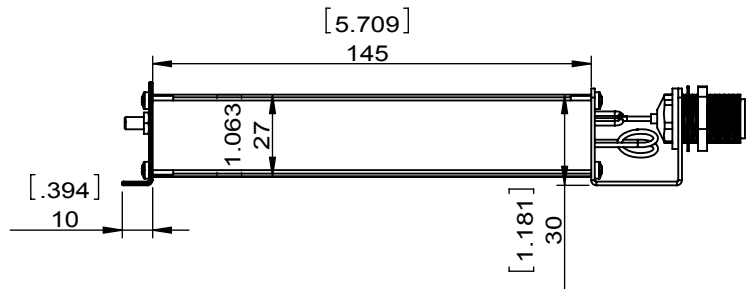

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

<b>JQL JQL Electronic Inc</b>				
<b>MATERIAL:</b>		<b>DWG NO:</b> JFCD0380T0520NF		
<b>SURFACE TREATMENT:</b> PAINTED BLACK		DWG BY:	ZQ.H	11.13.2015
<b>DESCRIPTION:</b> DUPLEXER		CHK'D BY:		SACLE
		APPV'D BY:		2:5
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4