


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		ZC.Wu	12.14.2015	David			



SPECIFICATIONS	
Part's Number	JACWR28K-29K0T33K0
Frequency(GHz)	29.000~33.000
Direction	
Insertion Loss(dB)MAX	-
Isolation(dB)MIN	
Return Loss(dB)MIN	21.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	
Operating Temperature(°C)	
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: AL		DWG NO: JACWR22K-29K0T33K0		
SURFACE TREATMENT:		DWG BY:	ZC.Wu	12.14.2015
DESCRIPTION: WAVEGUIDE COAX ADAPTOR		CHK'D BY:		SCALE
		APPV'D BY:		3:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

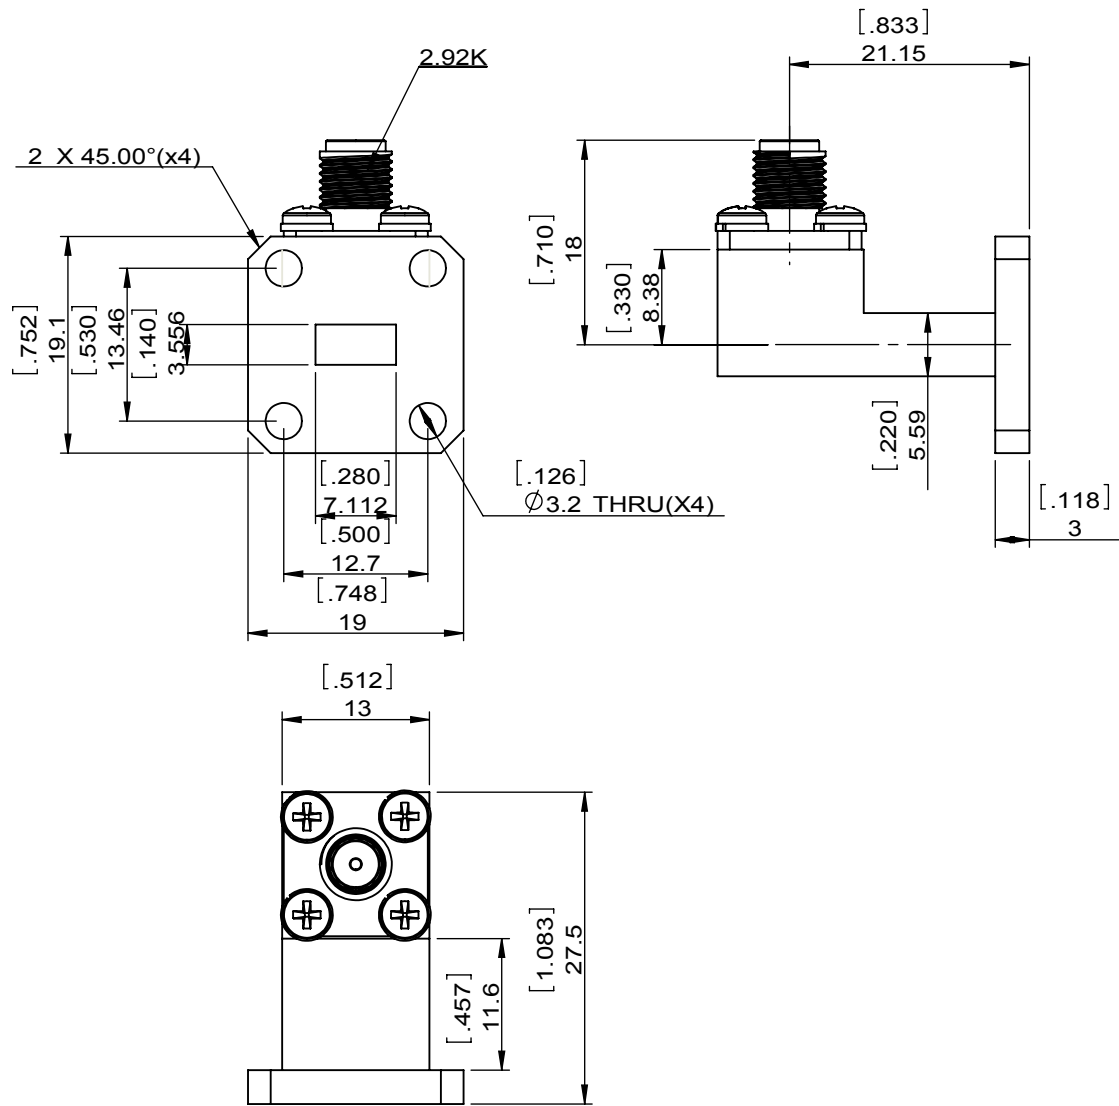

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.