



1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISER	ZQ.Hou	DATE	12.04.2015	APPROVED	David

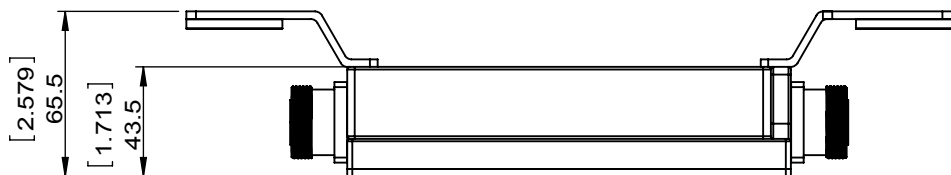



ITEM	SPECIFICATIONS	
Frequency range(MHz)	1710~1785	1805~1880
Insertion Loss(dB)	0.8 Max	
Ripple(dB)	0.5 Max	
Isolation(dB)	75 Min(Between port1 to port2)	
Return Loss(dB)	20Min	
Impedance(Ω)	50	
Input Power(W)	150 Max	
Temperature(°C)	-20~+55	
Operating humidity	5%~95%	
Barometric pressure(kPa)	55~106(altitude:below 5000m)	
Application	Indoor or Outdoor(IP 65)	
Lightning protection	8kA 8/20μs pulse	
Connector	7/16 FEMALE	
Notes		

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> JFCD1710T1880DF-OD		
<b>SURFACE TREATMENT:</b> Painted Gray		DWG BY:	ZQ.Hou	12.04.2015
<b>DESCRIPTION:</b> DUPLXER		CHK'D BY:		SCALE
		APPV'D BY:		1:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4

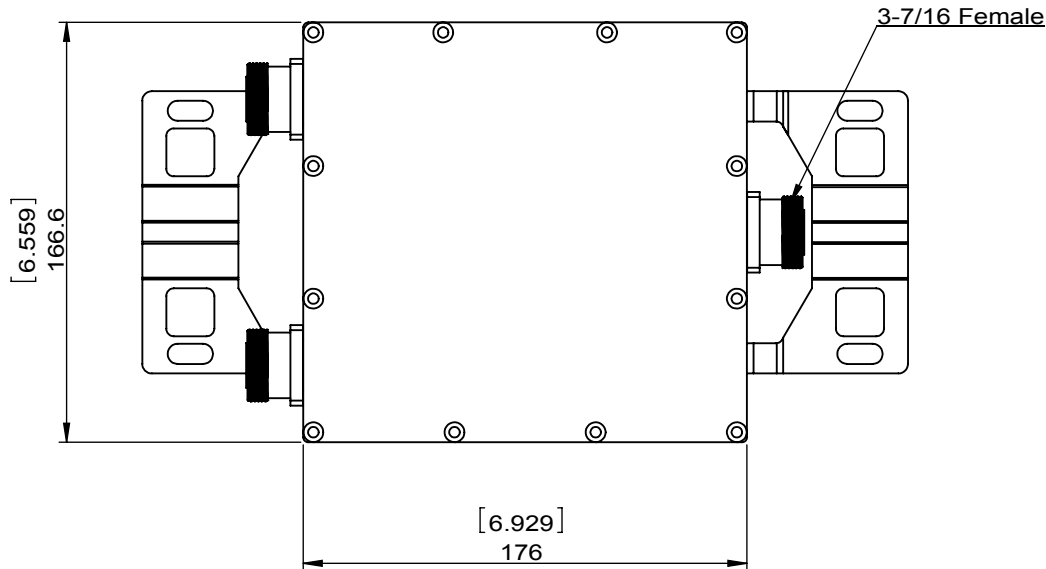

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

1		2		3		4		5		6	
Document No. QR4-700-T-003						REV. 0		DESCRIPTION		REVISER ZQ.Hou	
REV. A/0										DATE 12.04.2015	
										APPROVED David	

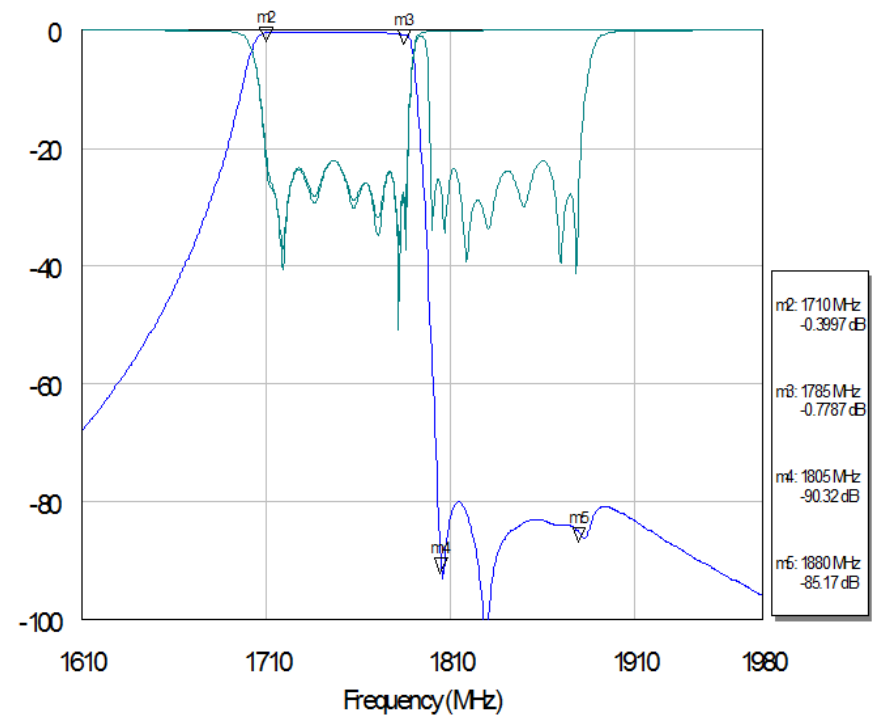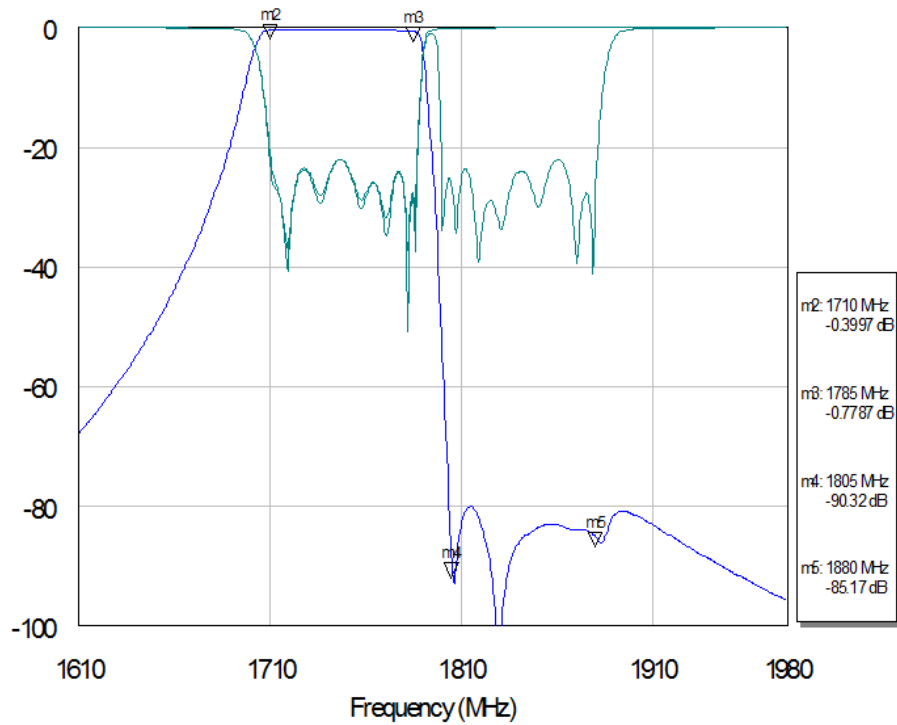

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> JFCD1710T1880DF-OD		
<b>SURFACE TREATMENT:</b> Painted Gray		DWG BY: ZQ.Hou	12.04.2015	SCALE
<b>DESCRIPTION:</b> DUPLXER		CHK'D BY:		1:3
		APPV'D BY:		A4
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.