



1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	ZC.Wu	DATE	12.01.2015	APPROVED	David



TOP VIEW



SIDE VIEW

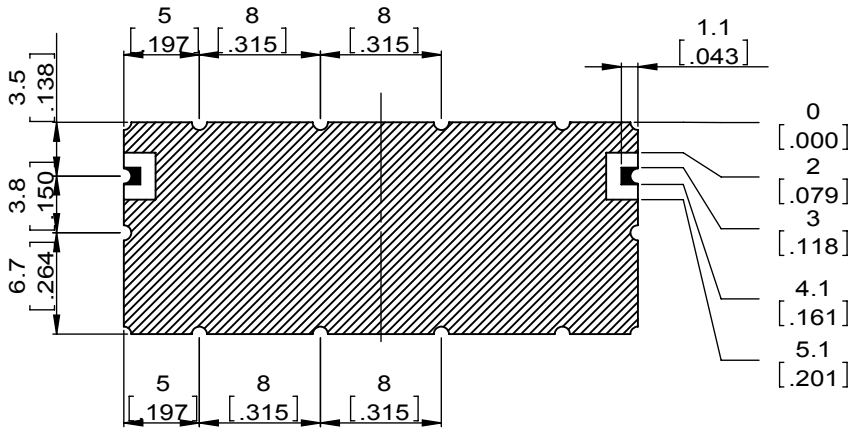

BOTTOM VIEW

TOLERANCE: ±0.20
UNIT: mm

▨ : GROUND
■ : I/O PORT



This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes
or communicated to third party as a whole or partly,
without the written consent of JQL Electronic Inc.

SPECIFICATIONS	
Part's Number	JRA4700F8R200SA
Center Frequency[fo](MHz)	4700.0
3 DB Bandwidth[BW](MHz)	fo±100.0 [4600.0~4800.0]
Insertion Loss in BW (dB)MAX	4.0
Ripple in BW P-P(dB)MAX.	3.0
Return Loss in BW(dB)MIN.	10.0
Attenuation[Absolute Value](dBc) MIN.	30.0@fo± [4170.0~4480.0MHz] 30.0@fo± [4920.0~5230.0MHz]
Attenuation[Relative Value](dBc) MIN.	-
Input Power(Watte)	-
In/Out Impedance(Ω)	50
Operation Temperature (°C)	-40~+85
Additional Notes	-

JQL JQL Electronic Inc

MATERIAL:

DWG NO:

JRA4700F8R200SA

SURFACE TREATMENT:

DWG BY:

ZC.Wu

12.01.2015

SCALE

CHK'D BY:

APPV'D BY:

3:2

DESCRIPTION:

FILTER

Unit:
mm[inch]

Tolerance:
Liner: ±0.30
Anguar: ±0.5°

The First:



A4