Document No.	QR4-700-T-003
REV.	A/0

REV.	DESCRIPTION	REVISOR	DATE	APPROVED
0		LJ.Zhang	03.06.2013	CH

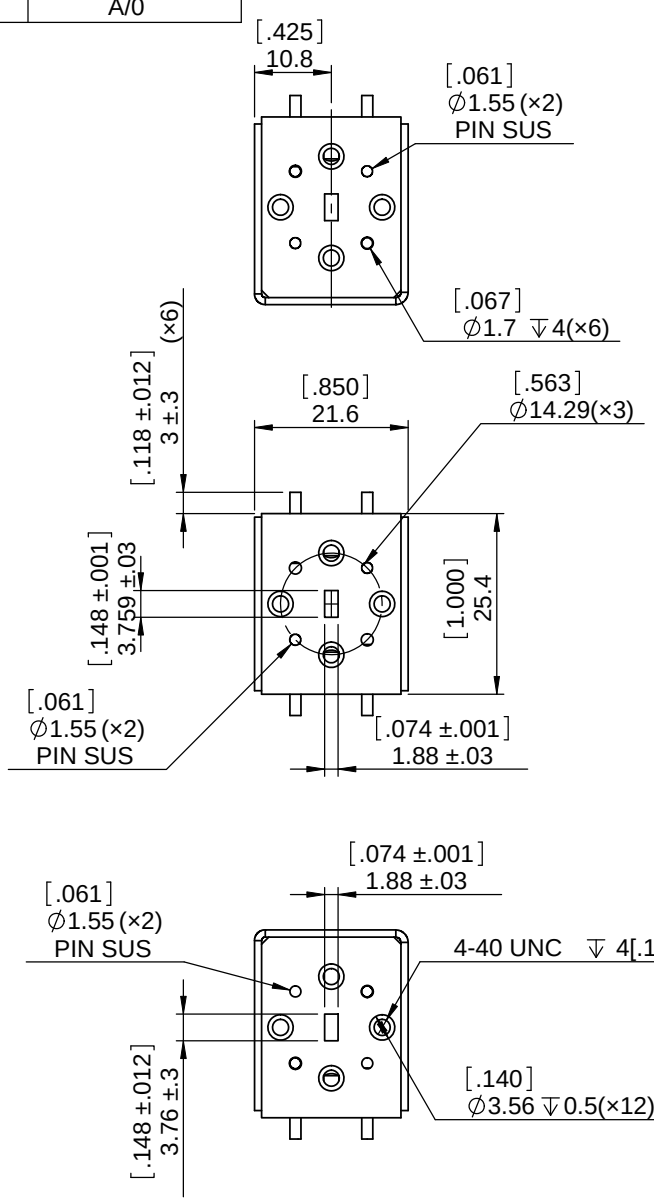



SPECIFICATIONS	
Part's Number	JCWR15-21.6-61K0T63K0
Frequency(GHz)	61.00~63.00
Direction	CW
Insertion Loss(dB)MAX	0.80
Isolation(dB)MIN	17.0
Return Loss(dB)MIN	16.5
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	1/1/-
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	-55~+100
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	

JQL Electronic Inc
500 Lake Cook Road, Suite 350
Deerfield, IL 60015, USA
Tel: 1(888)236-9828
Fax: 1(888)823-2902

MATERIAL:
Brass

SURFACE TREATMENT:
Gold Plated

DESCRIPTION:
WAVEGUIDE

DWG NO:
JCWR15-21.6-61K0T63K0

DWG BY:	LJ.Zhang	03.06.2013	SACLE
CHK'D BY:			1:1
APPV'D BY:			
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

RoHS COMPLIANCE

This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

WEIGHT:

SHEET 1 OF 1