



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		Hu.Jiang	07.17.20187	HC.Qiu			

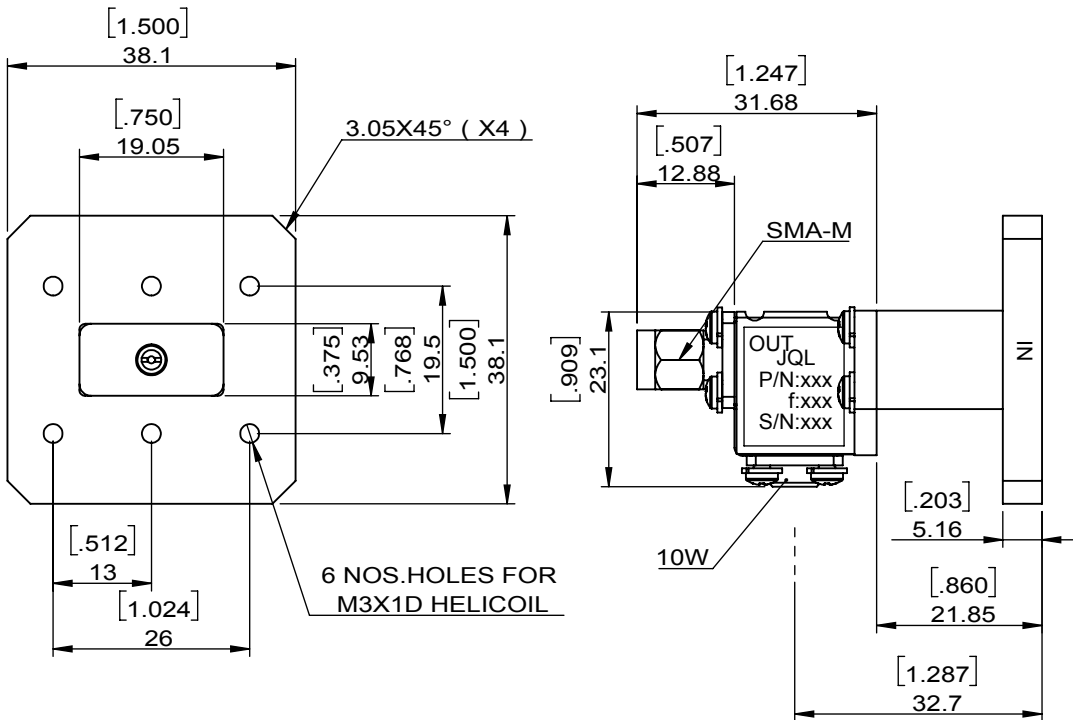

SPECIFICATIONS	
Part's Number	JISO75-12K75T13K5
Frequency(GHz)	12.750~13.500
Direction	-
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Ripple(dB)MAX	0.01
Power FWD/REV/PK(Watt)	100/100/-
Operating Temperature(°C)	-20~+70
Storage Temperature(°C)	-
Loss slope (over any 40 MHz)(dB)MAX	0.15
Termination/Attenuator(Watt/dB)	10W
Insertion loss Discontinuity(Glitch) over operating temperature range	< 0.1dB Peak to Peak
Additional Notes	Space qualified hardware external Black thermal paint.

JQL JQL Electronic Inc				
MATERIAL: VARIOUS		DWG NO: JISO75-12K75T13K5		
SURFACE TREATMENT: Black thermal paint		DWG BY:	Hu.Jiang	07.17.2018
DESCRIPTION: Waveguide Coaxial Adaptor		CHK'D BY:		SCALE
		APPV'D BY:		1:1
Unit: mm[inch]		Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	
				A4

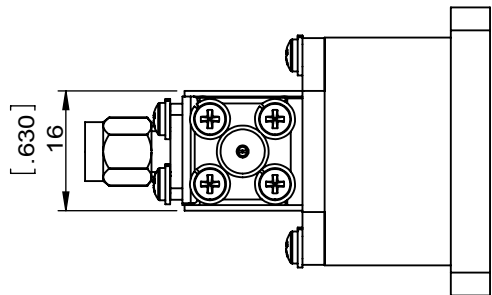

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.