

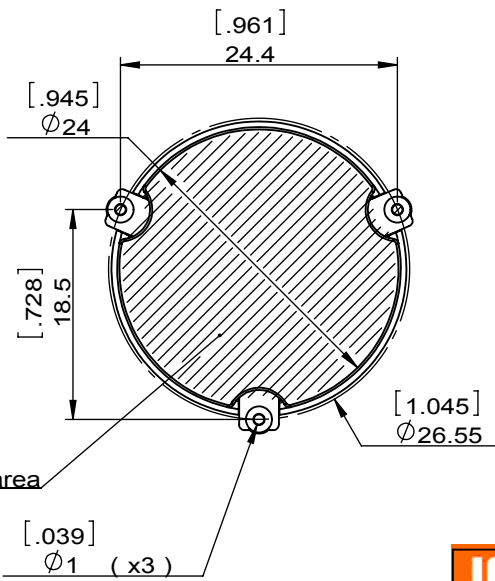
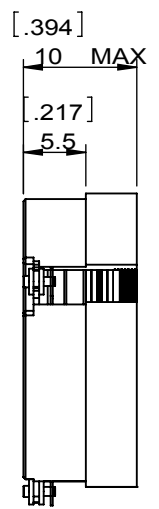
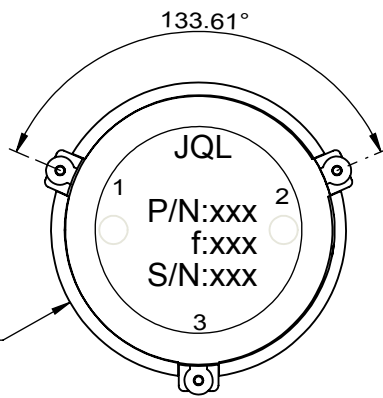


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	Hu.Jiang	DATE	09.17.2018	APPROVED	HC.Qiu



SPECIFICATIONS	
Part's Number	JCM0980T1280PNM50P
Frequency(GHz)	0.980~1.280
Direction	
Insertion Loss(dB)MAX	0.3@25±5°C 0.35@-40~+85°C
Isolation(dB)MIN	22@25±5°C 20@-40~+85°C
Return Loss(dB)MIN	22@25±5°C 20@-40~+85°C
3rd IMD(dBc)MAX	
Power FWD/REV/PK(Watt)	-/-/50 peak, 150 us pulse width, 2% duty cycle
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

JQL JQL Electronic Inc				
MATERIAL: STEEL		DWG NO: JCM0980T1280PNM50P		
SURFACE TREATMENT: NICKLE PLATING		DWG BY:	Hu.Jiang	09.17.2018
DESCRIPTION: SMT CIRCULATOR		CHK'D BY:		SCALE
		APP'V'D BY:		3:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.