


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	Hu.Jiang	DATE	09.04.2018	APPROVED	CH.Qiu



SPECIFICATIONS	
Part's Number	JPD4-0380T3000S0
Frequency(GHz)	0.38~3.00
Direction	
Insertion Loss(dB)MAX	1.7@TYP 1.9
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	15.6@INPUT 17.7@OUTPUT
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	30/2/-
Operating Temperature(°C)	-45~+85
Storage Temperature(°C)	-
Impedance	50Ω
Amplitude Balance	±0.4 dB
Phase Balance	±5 deg
Additional Notes	CONNECTORS:SMA-Female

1. Dimensions are in mm [Inches]
 2. Tolerances: Outline drawing: ±0.4 [0.016]
 Hole: ±0.3 [0.012]

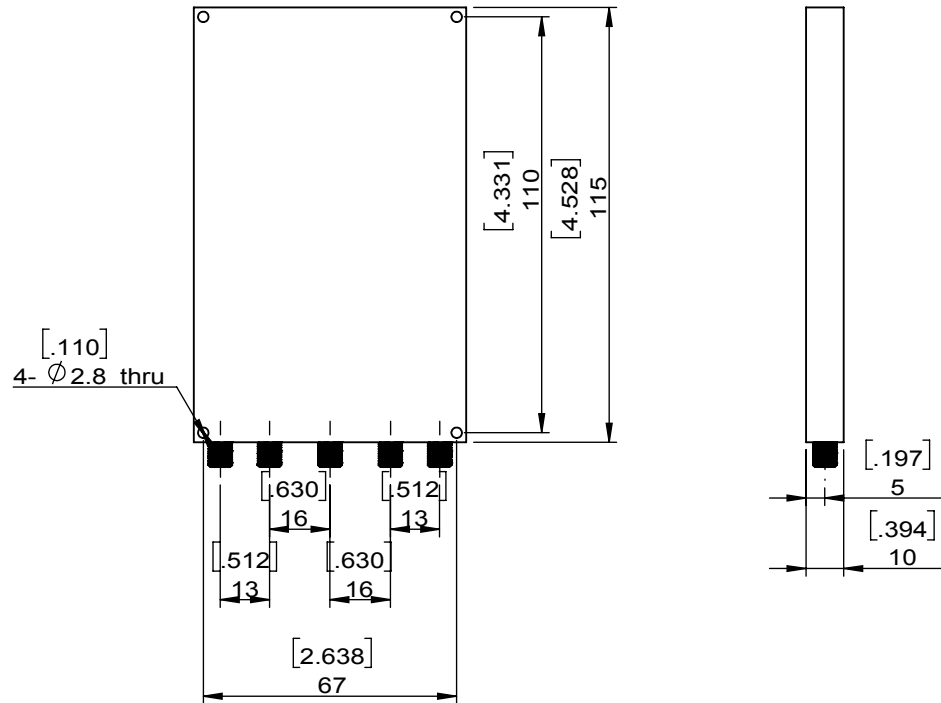

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JPD4-0380T3000S0		
SURFACE TREATMENT: Gray Paint		DWG BY:	Hu.Jiang	09.04.2018
DESCRIPTION: Power Divider		CHK'D BY:		SCALE
		APPV'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4