


1		2		3		4		5		6	
Document No.		QR4-700-T-003		REV.		DESCRIPTION		REVISOR		DATE	
REV.		A/0		0				YL.Chen		01.16.2019	
								APPROVED		HC.Qiu	



ITEM	SPECIFICATIONS
Frequency Range(GHz)	9.2~9.7
Forward Coupling(dB)	20 ± 1
Reverse Coupling(dB)	20 ± 1
Peak Power(W)	200 Min
Average Power(W)	40 Min
Insertion Loss(dB)	0.2 Max
Directivity(dB)	15 Min
Return Loss (dB)	20 Min
Connector	SMA Female
Cooling	Ambient
Operating Temperature(°C)	-10~+55
Additional Notes	-

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b>		
		DC9200T9700SF-20		
<b>SURFACE TREATMENT:</b>		DWG BY:	YL.Chen	01.16.2019
CHEM FILM		CHK'D BY:		SCALE
<b>DESCRIPTION:</b>		APPV'D BY:		1:2
DIRECTION COUPLER		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25	
			Anguar: ±0.5°	A4

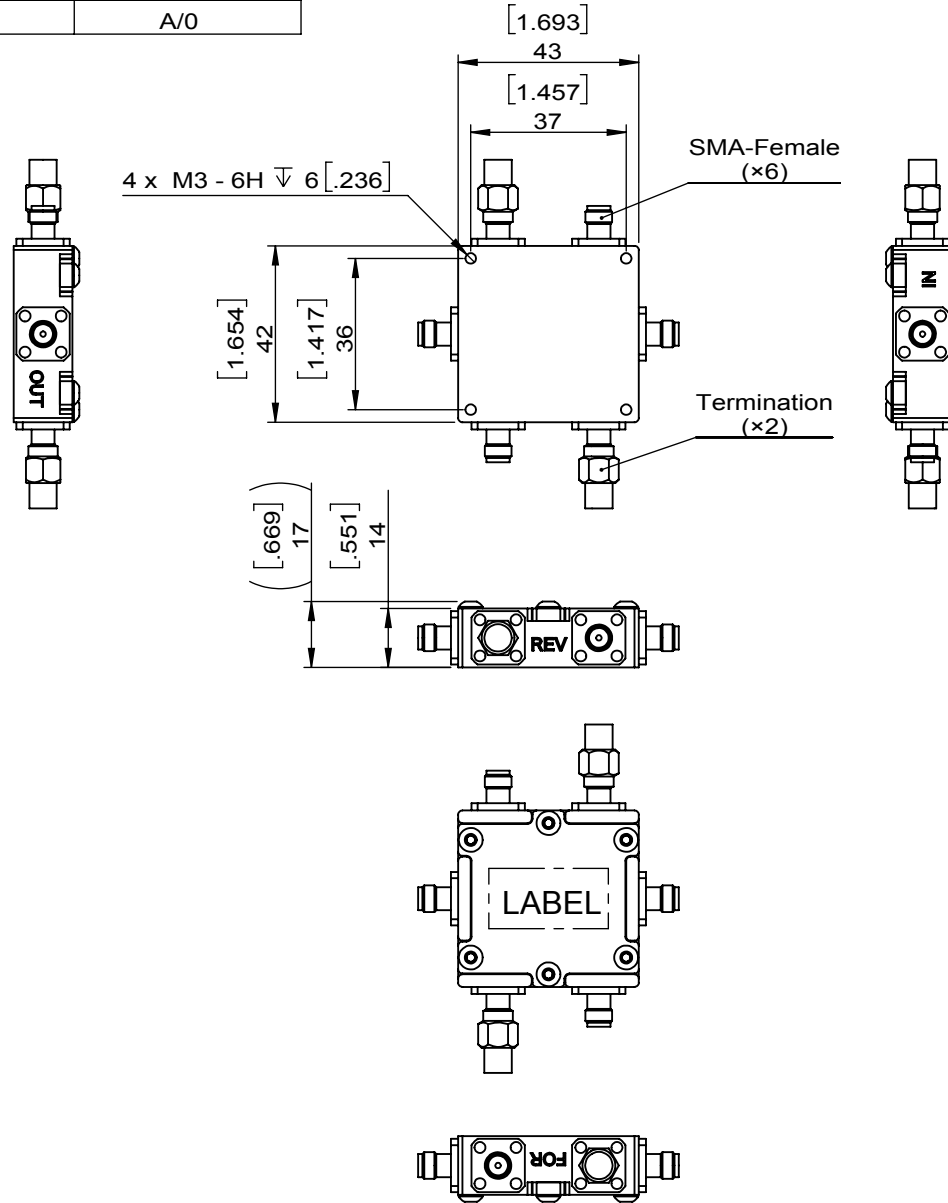

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.