

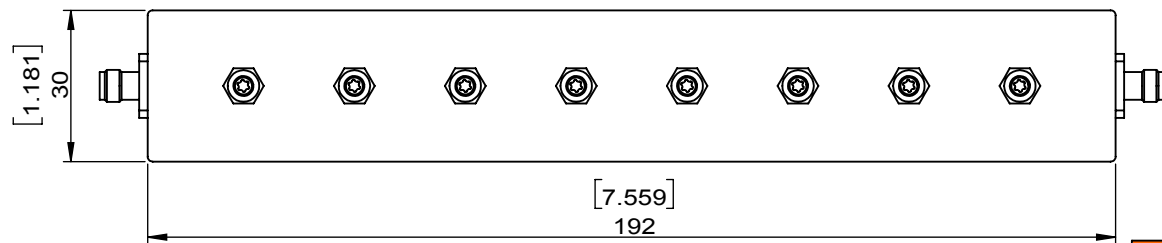


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISER	DATE	APPROVED	
REV.	A/0					0		YL.Chen	08.22.2019	HC.Qiu	

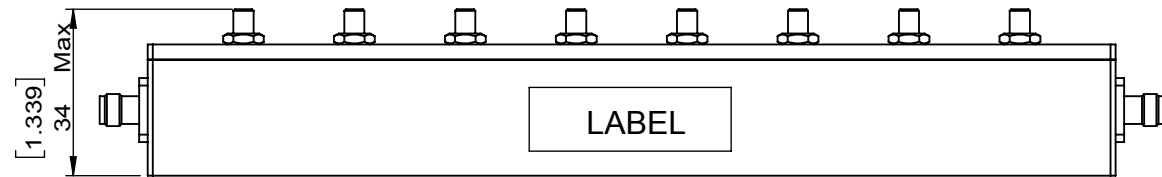

ITEM	SPECIFICATIONS
Frequency(MHz)	3500 ~ 4800
Insertion Loss(dB)	3.5 Max
Return Loss(dB)	16 Min
Rejection(dB)	40 Min@3000MHz
Temperature(°C)	-20~+65
Connector	SMA Female
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO:		
		JFCB3500T4800SF		
SURFACE TREATMENT:		DWG BY:	YL.Chen	08.22.2019
Silver Plating		CHK'D BY:		SCALE
DESCRIPTION:		APPV'D BY:		1:1.5
Filter		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25	
			Anguar: ±0.5°	A4

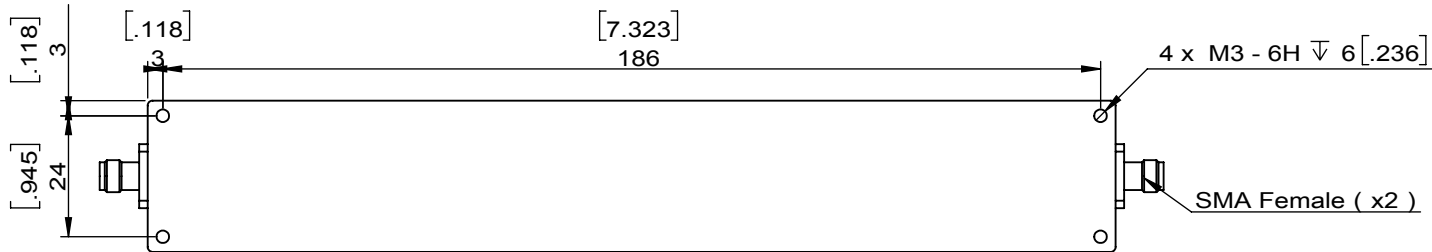

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.