

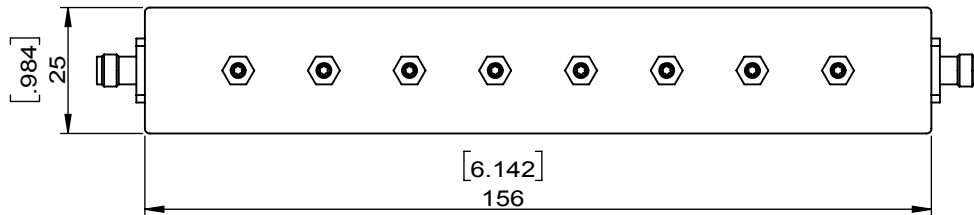


1		2		3		4		5		6	
Document No.		QR4-700-T-003		REV.		DESCRIPTION		REVISER		DATE	
REV.		A/0		0				YL.Chen		08.22.2019	
								HC.Qiu		APPROVED	

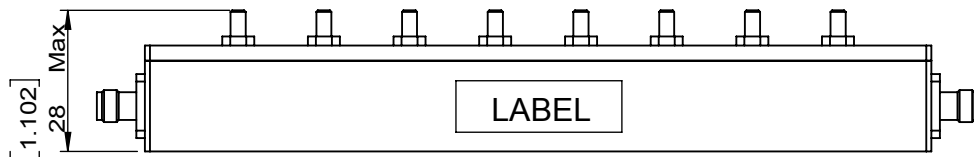

ITEM	SPECIFICATIONS
Frequency(MHz)	5000 ~ 6300
Insertion Loss(dB)	3.5 Max
Return Loss(dB)	16 Min
Rejection(dB)	40 Min@4500MHz
Temperature(°C)	-20~+65
Connector	SMA Female
Notes	

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: JFCB5000T6300SF		
SURFACE TREATMENT: Silver Plating		DWG BY:	YL.Chen	08.22.2019
DESCRIPTION: Filter		CHK'D BY:		SCALE
		APPV'D BY:		1:1.5
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

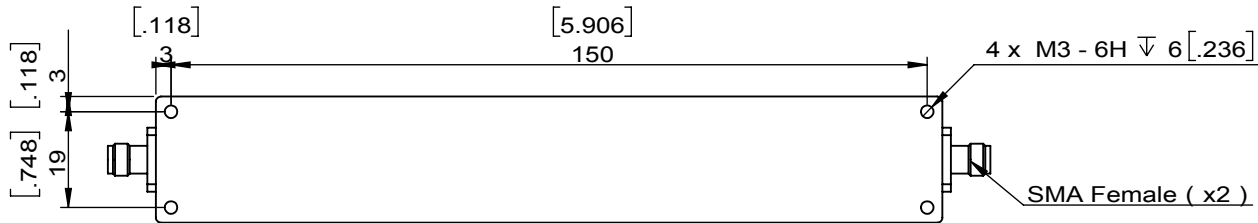

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.