

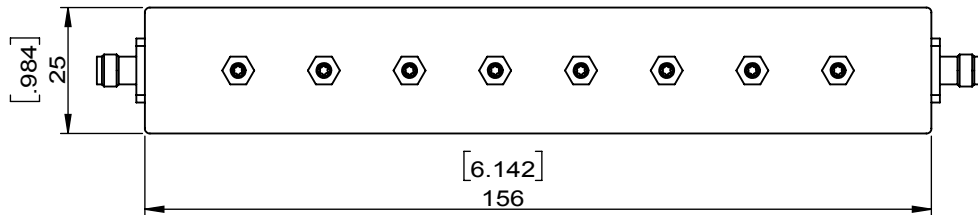


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISER	DATE	APPROVED	
REV.	A/0					0		YL.Chen	08.22.2019	HC.Qiu	

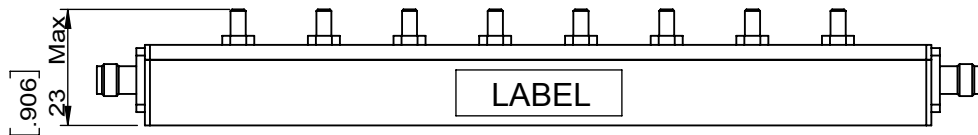

ITEM	SPECIFICATIONS
Frequency(MHz)	8000 ~ 9300
Insertion Loss(dB)	3.5 Max
Return Loss(dB)	16 Min
Rejection(dB)	40 Min@7500MHz
Temperature(°C)	-20~+65
Connector	SMA Female
Notes	

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		DWG NO: JFCB8000T9300SF		
<b>SURFACE TREATMENT:</b> Silver Plating		DWG BY:	YL.Chen	08.22.2019
<b>DESCRIPTION:</b> Filter		CHK'D BY:		SCALE
		APPV'D BY:		1:1.5
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4

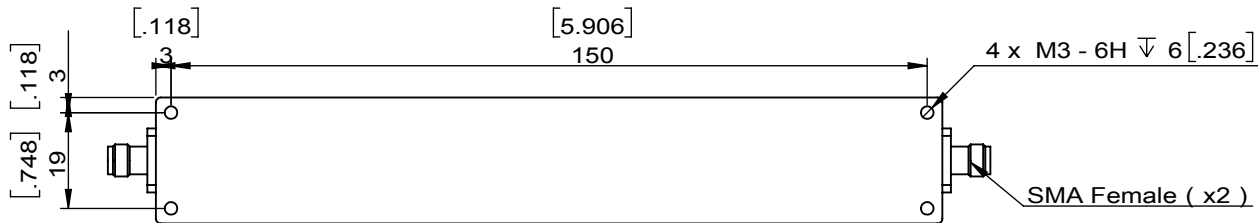

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.