


| | | | | | | | | | | | |
|--------------|---------------|---|--|---|--|------|-------------|---------|------------|----------|--|
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 | |
| Document No. | QR4-700-T-003 | | | | | REV. | DESCRIPTION | REVISER | DATE | APPROVED | |
| REV. | A/0 | | | | | 0 | | YL.Chen | 08.22.2019 | HC.Qiu | |



| ITEM | SPECIFICATIONS |
|-------------------------------------|-----------------------------------|
| Center Frequency(MHz) | 100 |
| Bandwidth(MHz) | 15 |
| Center Frequency Insertion Loss(dB) | 2.0 Max |
| Return Loss(dB) | 14 Min |
| Rejection(dB) | 60 Min @ 70MHz 60 Min @ 130MHz |
| Temperature(°C) | -20~+65 |
| Connector | SMA Female |
| Notes | |

| | | | | |
|---|--|-------------------------|---|------------|
| JQL JQL Electronic Inc | | | | |
| MATERIAL: | | DWG NO: JFLC0092T0108SF | | |
| SURFACE TREATMENT: Silver Plating | | DWG BY: YL.Chen | 08.22.2019 | SCALE |
| DESCRIPTION: Filter | | CHK'D BY: | | 2:1 |
| | | APPV'D BY: | | |
| | | Unit: mm[inch] | Tolerance: Liner: ± 0.25 Anguar: $\pm 0.5^\circ$ | The First: |
| | | | | A4 |

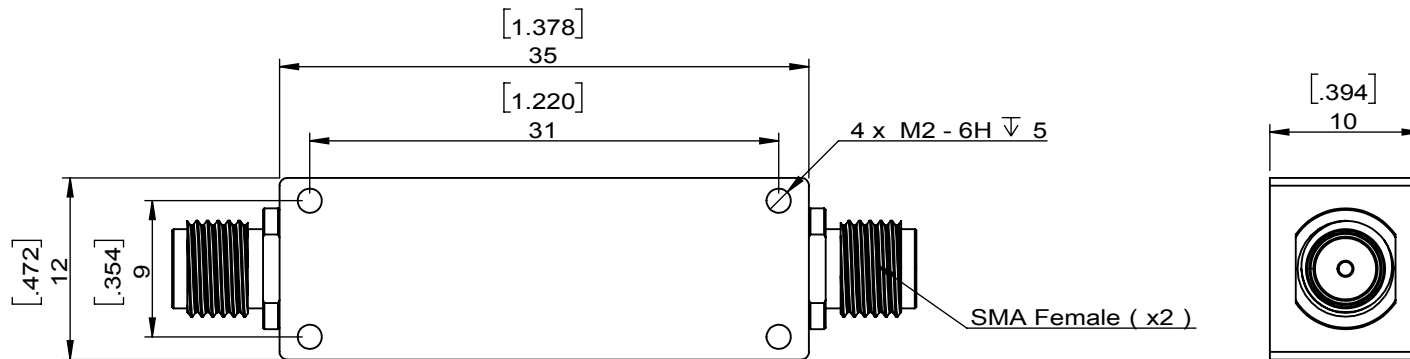

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.