

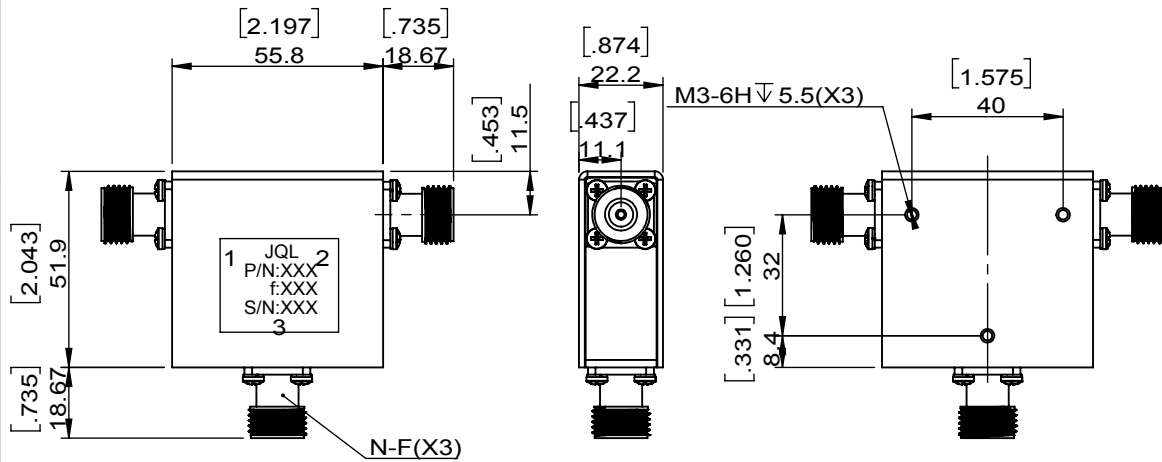


|              |               |      |     |      |             |          |            |          |  |   |  |
|--------------|---------------|------|-----|------|-------------|----------|------------|----------|--|---|--|
| 1            |               | 2    |     | 3    |             | 4        |            | 5        |  | 6 |  |
| Document No. | QR4-700-T-003 | REV. | A/0 | REV. | DESCRIPTION | REVISOR  | DATE       | APPROVED |  |   |  |
|              |               |      |     | 0    |             | Hu.Jiang | 02.07.2020 | HC.Qiu   |  |   |  |



| SPECIFICATIONS                  |                  |
|---------------------------------|------------------|
| Part's Number                   | JCC2000T4000NF25 |
| Frequency(GHz)                  | 2.000~4.000      |
| Direction                       |                  |
| Insertion Loss(dB)MAX           | 0.6              |
| Isolation(dB)MIN                | 15.0             |
| Return Loss(dB)MIN              | 14.7             |
| 3rd IMD(dBc)MAX                 | -                |
| Power FWD/REV/PK(Watt)          | 250/250/250      |
| Operating Temperature(°C)       | -60~+70          |
| Storage Temperature(°C)         | -                |
| 2nd/3rd Harmonic(dBc)           | -                |
| Termination/Attenuator(Watt/dB) | -                |
| Tab(W×LG×THK)(mm[Inch])         |                  |
| Additional Notes                | -                |

|                                            |  |                                    |                                             |                |
|--------------------------------------------|--|------------------------------------|---------------------------------------------|----------------|
| <b>JQL</b> JQL Electronic Inc              |  |                                    |                                             |                |
| <b>MATERIAL:</b><br>STEEL                  |  | <b>DWG NO:</b><br>JCC2000T4000NF25 |                                             |                |
| <b>SURFACE TREATMENT:</b><br>NICKL PLATING |  | DWG BY:                            | Hu.Jiang                                    | 02.07.2020     |
| <b>DESCRIPTION:</b><br>Coax circulator     |  | CHK'D BY:                          |                                             | SCALE          |
|                                            |  | APPV'D BY:                         |                                             | 1:2            |
|                                            |  | Unit:<br>mm[inch]                  | Tolerance:<br>Liner: ±0.25<br>Anguar: ±0.5° | The First:<br> |
|                                            |  |                                    |                                             | A4             |



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.