
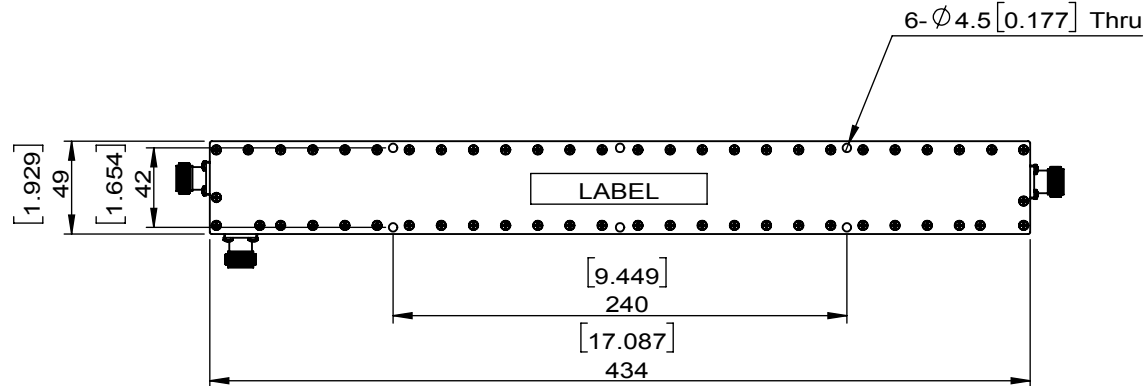


1		2		3		4		5		6		
Document No. QR4-700-T-003								REV.	DESCRIPTION	REVISER	DATE	APPROVED
REV. A/0								0		S.Zhang	12.18.2019	HC.Qiu

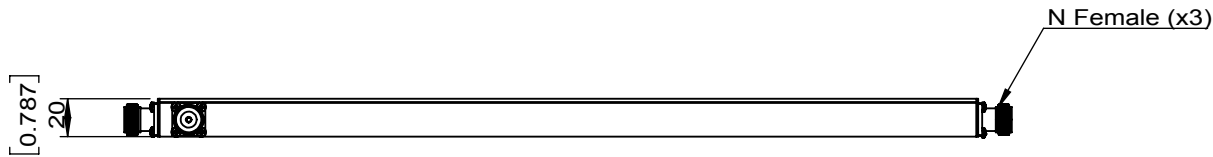

ITEM	SPECIFICATIONS
Frequency Range(MHz)	150~600
Coupling(dB)	10
Insertion Loss(dB)	1.0 Max
Flatness(dB)	±1.3
Return Loss(dB)	19 Min
Directivity	20 Min
Peak Power(W)	20 Min
Average Power(W)	10 Min
PIM(dBc)	150 Min @ 2x43dBm
Impedance(Ω)	50
Temperature(°C)	-30~+60
Connector	N Female
Notes	

JQL JQL Electronic Inc

MATERIAL:	DWG NO: DC0150T0600NF-10dB			
SURFACE TREATMENT: Passivated Aluminum	DWG BY:	S.Zhang	12.18.2019	SCALE
	CHK'D BY:			
DESCRIPTION: Directional Coupler	APPV'D BY:			1:4
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.