
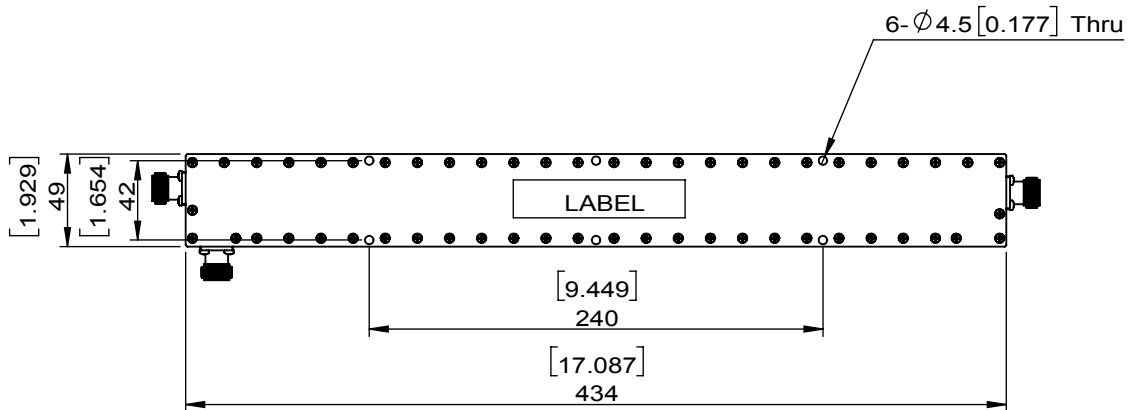


1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISER	DATE	APPROVED	
REV.	A/0					0		S.Zhang	11.04.2019	HC.Qiu	

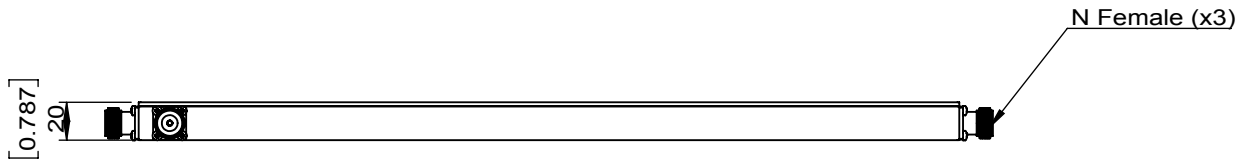

ITEM	SPECIFICATIONS
Frequency Range(MHz)	150~600
Coupling(dB)	20
Insertion Loss(dB)	0.7 Max
Flatness(dB)	±2
Return Loss(dB)	19 Min
Directivity	20 Min
Peak Power(W)	20 Min
Average Power(W)	10 Min
PIM(dBc)	150 Min @ 2x43dBm
Impedance(Ω)	50
Temperature(°C)	-30~+60
Connector	N Female
Notes	

**JQL** JQL Electronic Inc

<b>MATERIAL:</b>	<b>DWG NO:</b> DC0150T0600NF-20dB			
<b>SURFACE TREATMENT:</b> Passivated Aluminum	DWG BY:	S.Zhang	11.04.2019	SCALE
	CHK'D BY:			1:4
<b>DESCRIPTION:</b> Bi-Directional Coupler	APPV'D BY:			
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.