
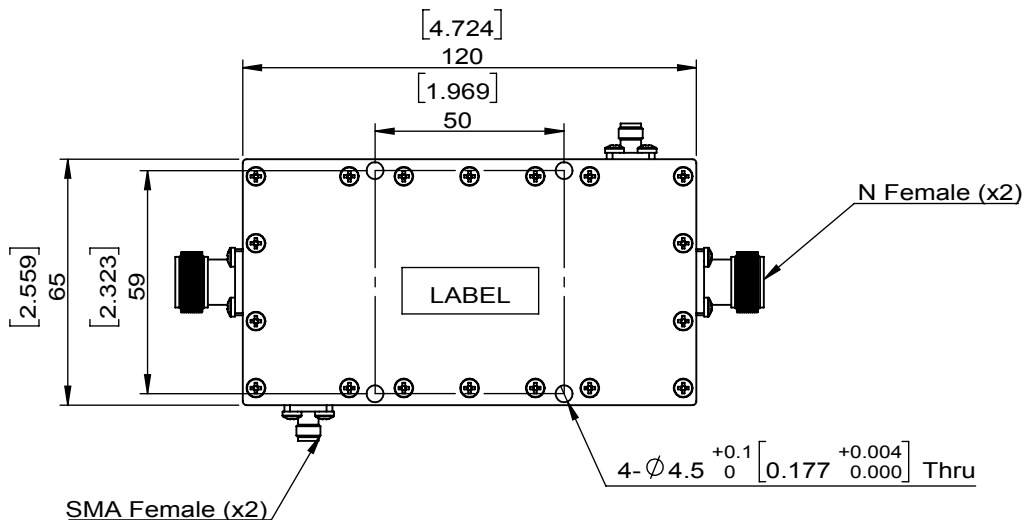


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISER	DATE	APPROVED			
				0		S.Zhang	11.04.2019	HC.Qiu			



ITEM	SPECIFICATIONS
Frequency Range(MHz)	700~1000
Insertion Loss(dB)	0.2 Max
Coupling(dB)	35 ± 2
Directivity	20Min
Return Loss(dB)	21Min
Average Power(W)	300
Impedance(Ω)	50
Temperature(°C)	-30~+60
Connector	IN / OUT Port: N Female Coupler Port : SMA Female
Notes	

JQL JQL Electronic Inc

MATERIAL:	DWG NO: DC0700T1000NF-35dB-SIN			
SURFACE TREATMENT: Passivated Aluminum	DWG BY:	S.Zhang	11.04.2019	SCALE
	CHK'D BY:			
DESCRIPTION: Bi-Directional Coupler	APPV'D BY:			1:2
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.