



1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		Hu.Jiang	04.16.2020	HC.Qiu	

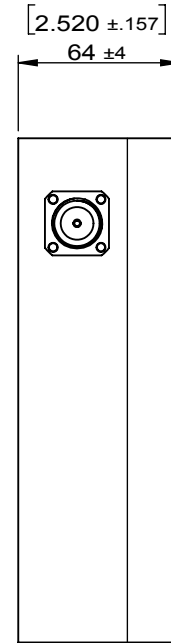

**Product Features:**

- ◆ Wide Frequency Band 400-6000MHz
- ◆ Tetra/2G/3G/4G/LTE/5G Coverage
- ◆ Low Port VSWR
- ◆ Low Passive Inter-modulation
- ◆ Easy Installation in projects
- ◆ Widely used for In-building Solutions

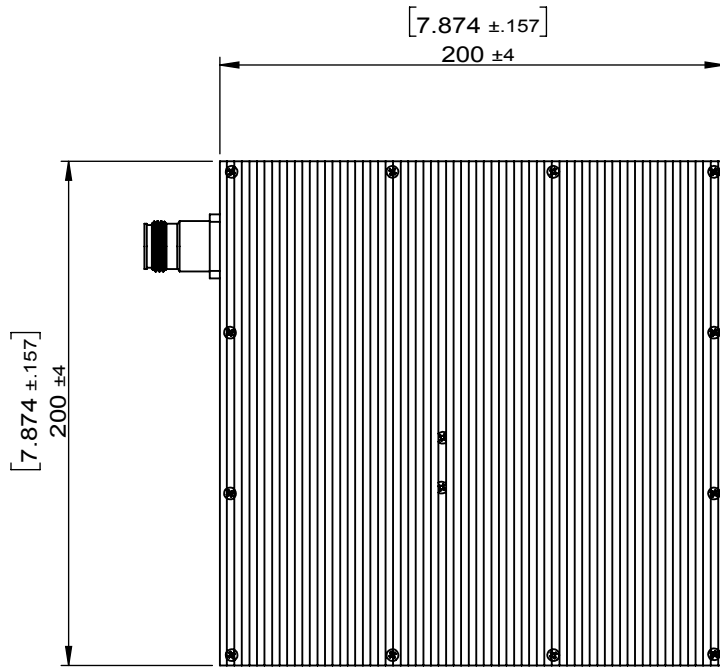


This document is the property of JQL Electronic Inc.  
It cannot be copied, duplicated, used for manufacturing purposes  
or communicated to third party as a whole or partly,  
without the written consent of JQL Electronic Inc.

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> MTL-100-460-4F-160		
<b>SURFACE TREATMENT:</b>		DWG BY:	Hu.Jiang	04.16.2020
<b>DESCRIPTION:</b> Termination Load		CHK'D BY:		SCALE
		APPV'D BY:		1:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4

1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		Hu.Jiang	04.16.2020	HC.Qiu	

Model No.	MTL-200-460-4F-160
Frequency(GHz)	0.400-6.000
VSWR	≤1.2
Average Power(W)	100
3rd PIM (dBc)	≤-160dBc@2*43dBm
Impedance	50ohm
Connector	4.3-10 Female
Color	Black
Ambient Temp(deg)	-35~+65
Relative Humidity	5%~95%
Application	Indoor & Outdoor IP66
Dimensions(mm)	200*200*64 (Connectors Excluded)
Weight(kg)	4.00

<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b> MTL-100-460-4F-160		
<b>SURFACE TREATMENT:</b>		DWG BY:	Hu.Jiang	04.16.2020
<b>DESCRIPTION:</b> Termination Load		CHK'D BY:		SCALE
		APPV'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.