



1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		Hu.Jiang	04.16.2020	HC.Qiu	

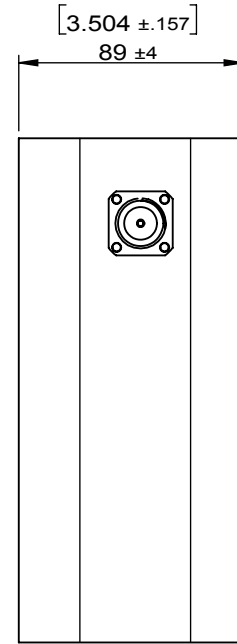

Product Features:

- ◆ Wide Frequency Band 400-6000MHz
- ◆ Tetra/2G/3G/4G/LTE/5G Coverage
- ◆ Low Port VSWR
- ◆ Low Passive Inter-modulation
- ◆ Easy Installation in projects
- ◆ Widely used for In-building Solutions

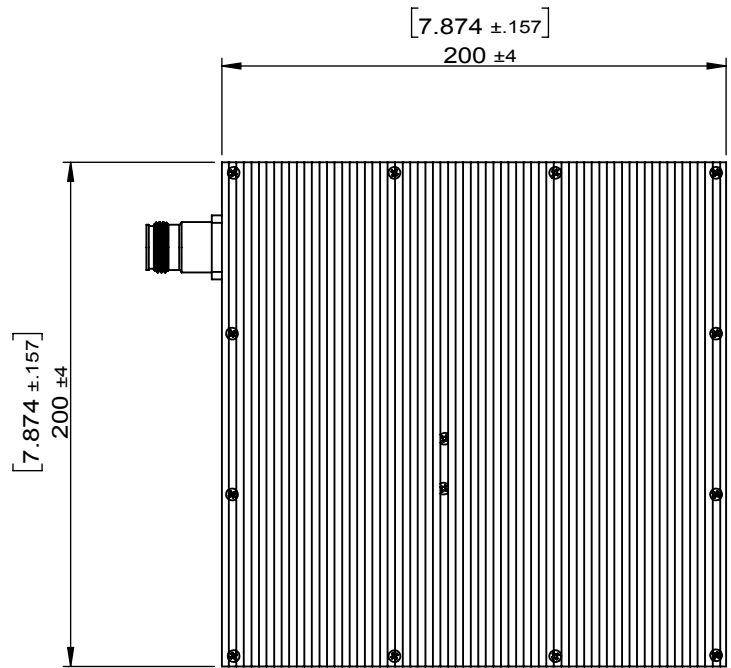


This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: MTL-200-460-4F-160		
SURFACE TREATMENT:		DWG BY:	Hu.Jiang	04.16.2020
DESCRIPTION: Termination Load		CHK'D BY:		SCALE
		APPV'D BY:		1:3
Unit: mm[inch]		Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISOR	DATE	APPROVED	
REV.	A/0					0		Hu.Jiang	04.16.2020	HC.Qiu	

Model No.	MTL-200-460-4F-160
Frequency(GHz)	0.400-6.000
VSWR	≤1.2
Average Power(W)	200
3rd PIM (dBc)	≤-160dBc@2*43dBm
Impedance	50ohm
Connector	4.3-10 Female
Color	Black
Ambient Temp(deg)	-35~+65
Relative Humidity	5%~95%
Application	Indoor & Outdoor IP66
Dimensions(mm)	200*200*89 (Connectors Excluded)
Weight(kg)	5.14

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: MTL-200-460-4F-160		
SURFACE TREATMENT:		DWG BY:	Hu.Jiang	04.16.2020
DESCRIPTION: Termination Load		CHK'D BY:		SCALE
		APPV'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4



This document is the property of JQL Electronic Inc.
It cannot be copied, duplicated, used for manufacturing purposes
or communicated to third party as a whole or partly,
without the written consent of JQL Electronic Inc.