


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	Hu.Jiang	DATE	04.16.2020	APPROVED	HC.Qiu

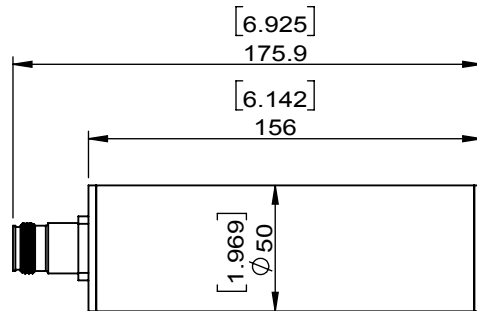

Model No.	MTL-05-460-4F-153	MTL-10-460-4F-153	MTL-50-460-4F-153
Frequency(MHz)	400~6000		
VSWR	≤1.2		
3rd PIM (dBc)	≤-153dBc@2*33dBm	≤-153dBc@2*33dBm	≤-153dBc@2*43dBm
Average Power(W)	5	10	50
Impedance	50 ohm		
Connector	4.3-10 Female		
Color	Black		
Working Temp(deg)	-35~+65		
Relative Humidity	5%~95%		
Application	Indoor IP66		
Dimensions(mm)	Φ50*156 (Connector Excluded)		
Weight(kg)	0.85		

Product Features:

- ◆ Wide Frequency Band 400-6000MHz
- ◆ Tetra/2G/3G/4G/LTE/5G Coverage
- ◆ Low Port VSWR
- ◆ Low Passive Inter-modulation
- ◆ Easy Installation in projects
- ◆ Widely used for In-building Solutions



This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.

JQL JQL Electronic Inc				
MATERIAL:		DWG NO: MTL-XX-460-4F-153		
SURFACE TREATMENT:		DWG BY:	Hu.Jiang	04.16.2020
DESCRIPTION: Termination Load		CHK'D BY:		SCALE
		APPV'D BY:		1:3
Unit: mm[inch]		Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4