



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		Hu.jiang	05.21.2020	HC.Qiu			

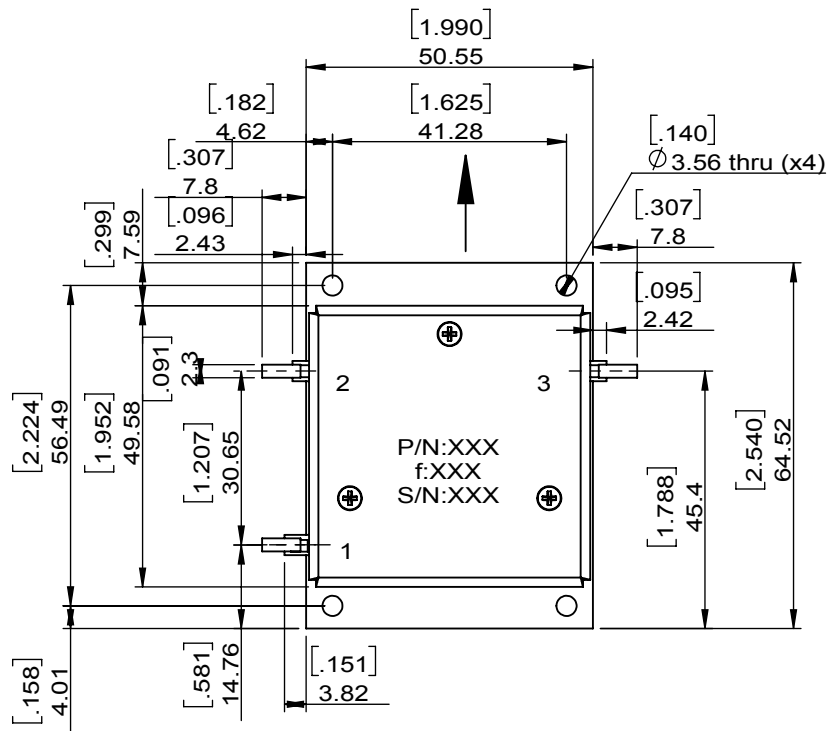

SPECIFICATIONS	
Part's Number	JCD0138T0174P15
Frequency(GHz)	0.138~0.174
Direction	CW
Insertion Loss(dB)MAX	0.7
Isolation(dB)MIN	17.0
Return Loss(dB)MIN	17.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	150/-/-
Operating Temperature(°C)	0~+65
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

<b>MATERIAL:</b> STEEL	<b>DWG NO:</b> JCD0138T0174P15			
<b>SURFACE TREATMENT:</b> Nickel Plating	DWG BY:	Hu.Jiang	05.21.2020	SCALE
	CHK'D BY:			
<b>DESCRIPTION:</b> Drop-In Circulator	APPV'D BY:			3:4
	Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

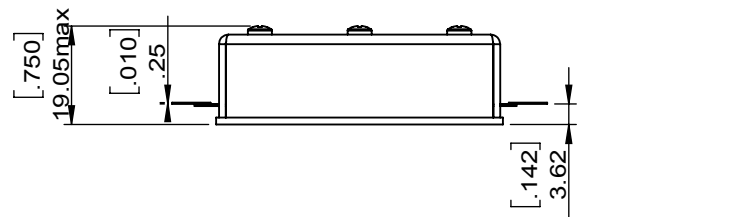

This document is the property of JQL Electronic Inc.  
It cannot be copied, duplicated, used for manufacturing purposes  
or communicated to third party as a whole or partly,  
without the written consent of JQL Electronic Inc.