



1		2		3		4		5		6	
Document No. QR4-700-T-003								REV.		DESCRIPTION	
REV.		A/0						0			
								Hu.Jiang		06.01.2020	
										APPROVED	
										HC.Qiu	

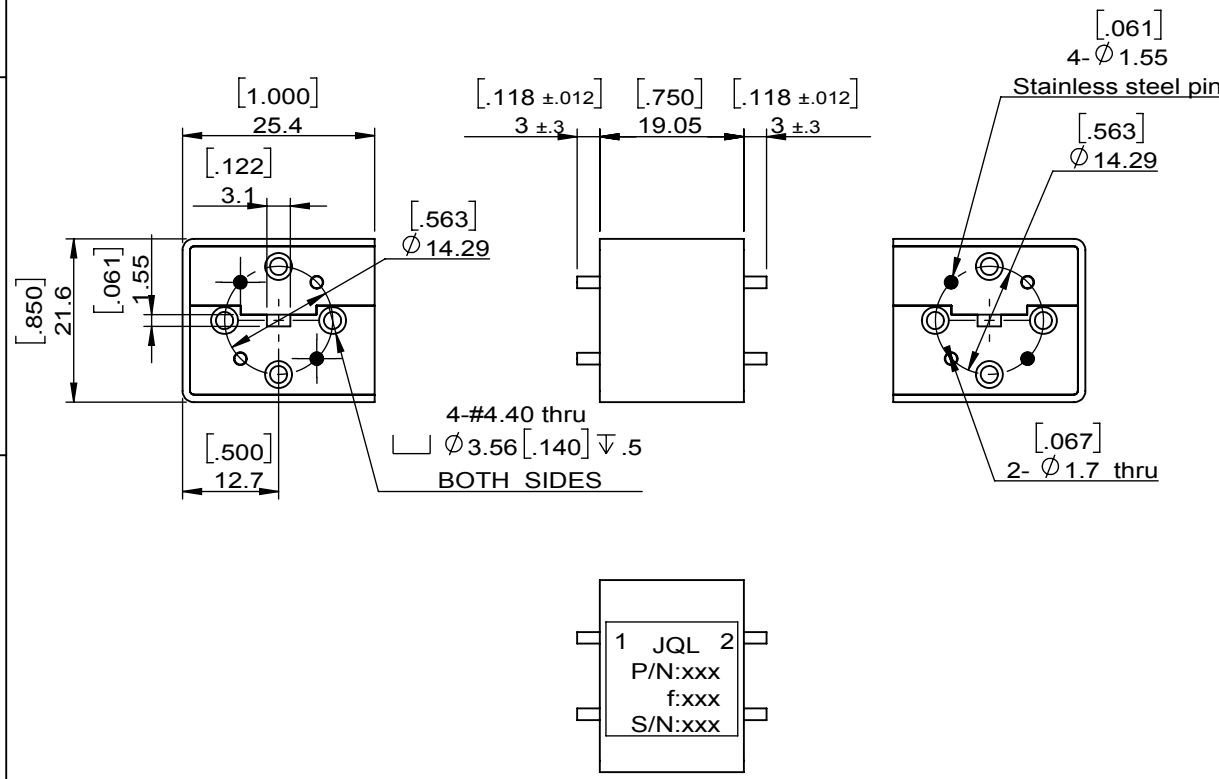

SPECIFICATIONS	
Part's Number	JIWR12-19-69K0T71K0
Frequency(GHz)	69.00~71.00
Direction	
Insertion Loss(dB)MAX	0.8@+25°C 1.0@-40~+70°C
Isolation(dB)MIN	18.0@+25°C 16.0@-40~+70°C
Return Loss(dB)MIN	17.7@+25°C 14.0@-40~+70°C
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	5/2/-
Operating Temperature(°C)	-40~+70
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-



<b>JQL</b> JQL Electronic Inc				
<b>MATERIAL:</b>		<b>DWG NO:</b>		
-		JIWR12-19-69K0T71K0		
<b>SURFACE TREATMENT:</b>		DWG BY:	Hu.Jiang	06.01.2020
CHEM FILM		CHK'D BY:		SCALE
<b>DESCRIPTION:</b>		APPV'D BY:		1:1
WAVEGUIDE ISOLATOR		Unit:	Tolerance:	The First:
		mm[inch]	Liner: ±0.25	
			Anguar: ±0.5°	A4

**RoHS COMPLIANCE**

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.