

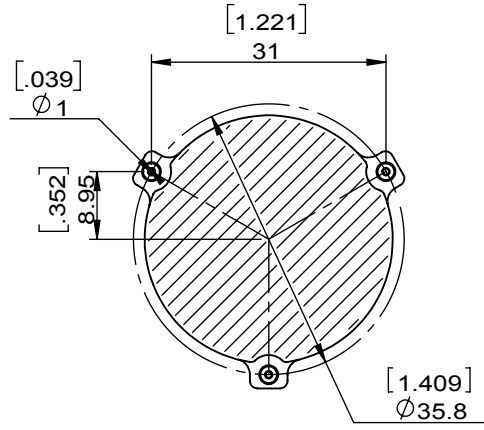

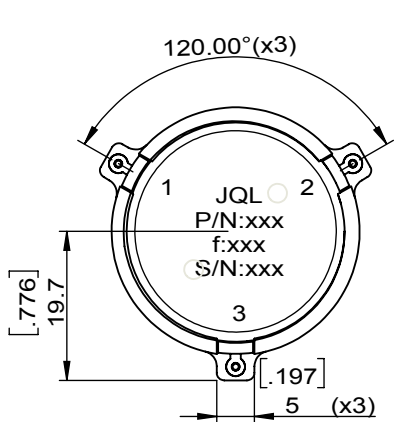


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		Hu.Jiang	05.27.2020	HC.Qiu			
				1	Change the parameters	Hu.Jiang	07.08.2020	HC.Qiu			



SPECIFICATIONS	
Part's Number	JCM0720T0960PH10R
Frequency(GHz)	0.720~0.960
Direction	CW
Insertion Loss(dB)MAX	0.5@+25°C 0.55@-20~+85°C
Isolation(dB)MIN	18.0@+25°C 16.0@-20~+85°C
Return Loss(dB)MIN	18.0@+25°C 16.0@-20~+85°C
3rd IMD(dBc)MAX	-64@2X30W,5MHz sparation
Power FWD/REV/PK(Watt)	100/100/500
Operating Temperature(°C)	-20~+85
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	

<b>JQL</b> JQL Technologies Corporation				
<b>MATERIAL:</b> STEEL		<b>DWG NO:</b> JCM0720T0960PH10R		
<b>SURFACE TREATMENT:</b> SILVER PLATING		DWG BY:	Hu.Jiang	05.27.2020
<b>DESCRIPTION:</b> SMT CIRCULATOR		CHK'D BY:		SCALE
		APP'V'D BY:		1:1
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4



This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.