


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		Hu.Jiang	07.17.2020	HC.Qiu			



SPECIFICATIONS	
Part's Number	JISO-WR137-5850T7025SM5
Frequency(GHz)	5.850~7025
Direction	
Insertion Loss(dB)MAX	0.5
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	18.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	50/20/-
Operating Temperature(°C)	-40~+60
Storage Temperature(°C)	-40~+85-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	-

JQL JQL Technologies Corporation				
MATERIAL: STEEL AND AL		DWG NO: JISO-WR137-5850T7025SM5		
SURFACE TREATMENT: NICKEL PLATING		DWG BY:	Hu.Jiang	07.17.2020
DESCRIPTION: Waveguide Coaxial Adaptor		CHK'D BY:		SCALE
		APPV'D BY:		2:3
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

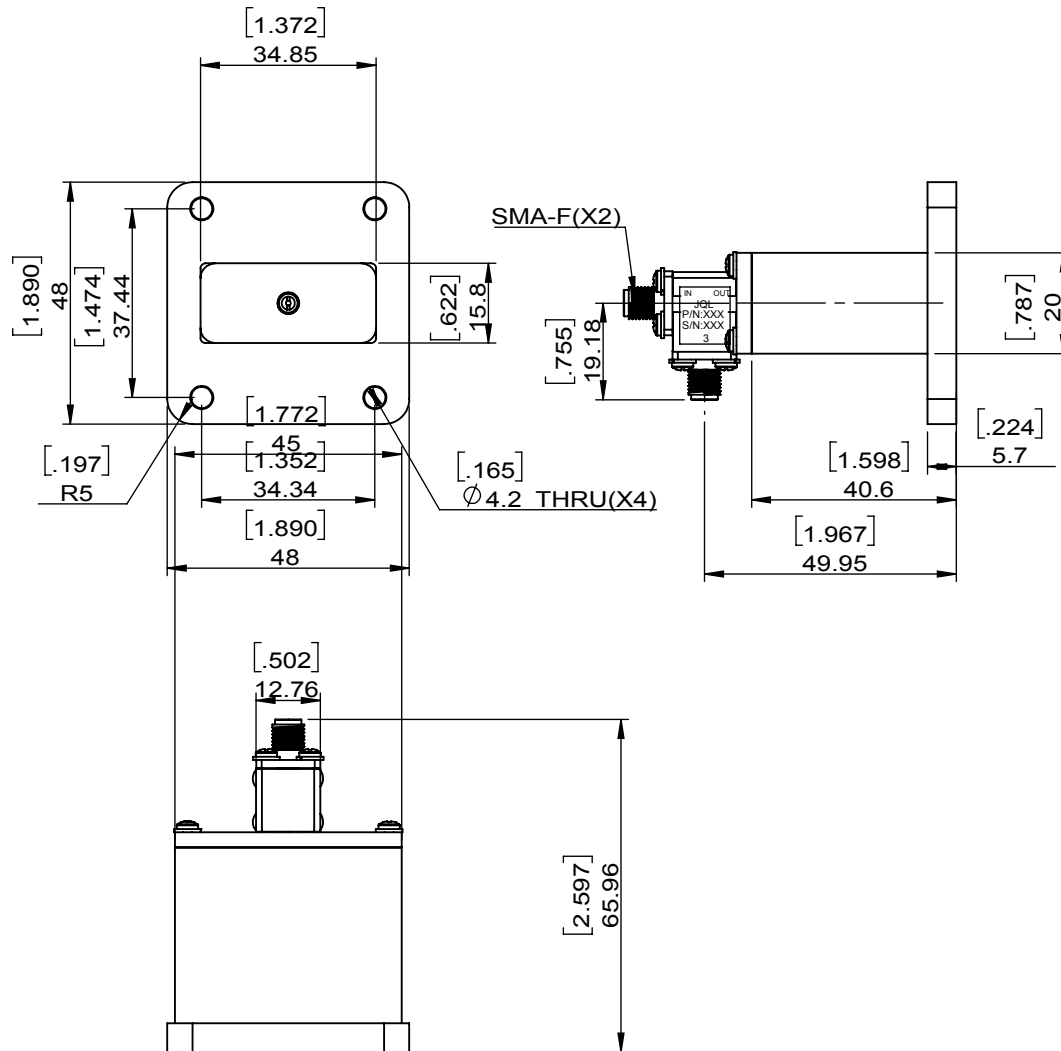

This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.