



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		Hu.Jiang	08.20.2020	HC.Qiu			

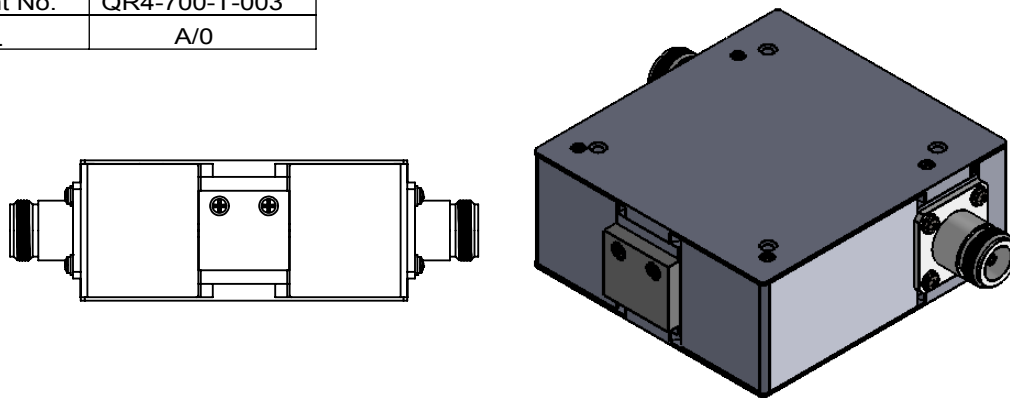

SPECIFICATIONS	
Part's Number	JIC0130T0170N5F
Frequency(GHz)	0.130~0.170
Direction	CW
Insertion Loss(dB)MAX	0.7
Isolation(dB)MIN	17.0
Return Loss(dB)MIN	17.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	50/50/-
Operating Temperature(°C)	+10~+50
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	150/-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

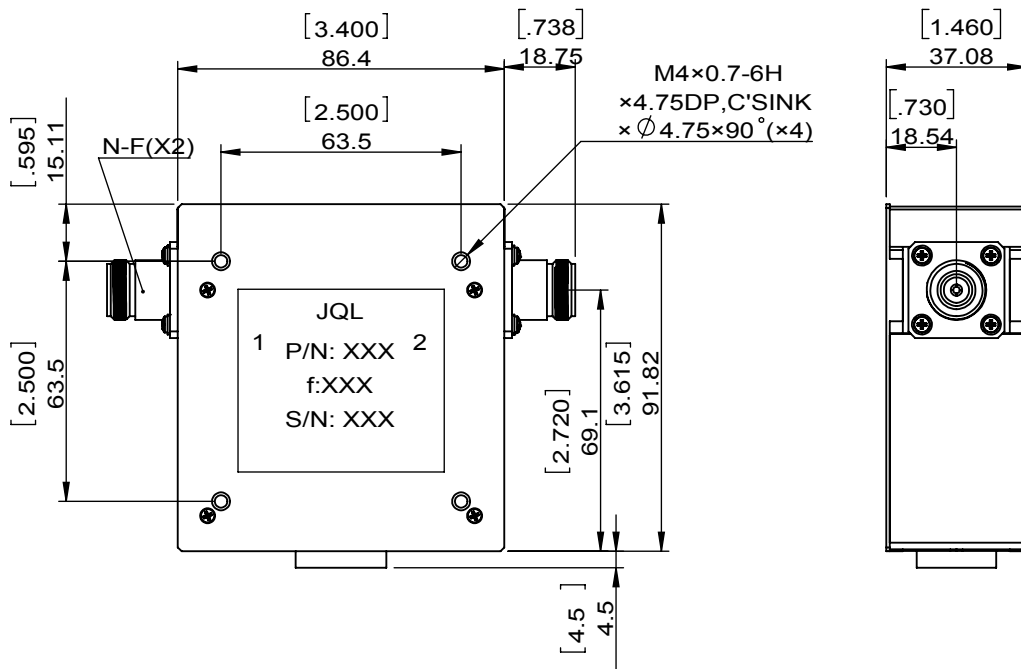

<b>JQL JQL Technologies Corporation</b>				
<b>MATERIAL:</b> STEEL		<b>DWG NO:</b> JIC0130T0170N5F		
<b>SURFACE TREATMENT:</b> NICKEL PLATING		DWG BY:	Hu.Jiang	08.20.2020
<b>DESCRIPTION:</b> COAXIAL ISOLATOR		CHK'D BY:		SCALE
		APP'V'D BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4



This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.

WEIGHT: