


1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		J.Z	11.01.2021	HC.Qiu					

SPECIFICATIONS	
Part's Number	JCD6000T12K0VM3
Frequency(GHz)	6.000~12.000
Direction	CW
Insertion Loss(dB)MAX	0.5
Insertion Loss(dB)MAX	0.5 @0dBm ; 0.8 @ 40W CW
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
3rd IMD(dBc)MAX	-
Power (Watt)	30
Operating Temperature(°C)	-40~+85
Storage Temperature(°C)	
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	
Additional Notes	+/-5° for the insertion loss phase match part to part



JQL JQL Technologies Corporation				
MATERIAL:		DWG NO: JCD6000T12K0VM3		
SURFACE TREATMENT:		DWG BY:	J.Z	11.01.2021
DESCRIPTION: DROP-IN CIRCULATOR		CHK'D BY:		SCALE
		APPV'D BY:		3:1
Unit: mm[inch]		Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:	A4

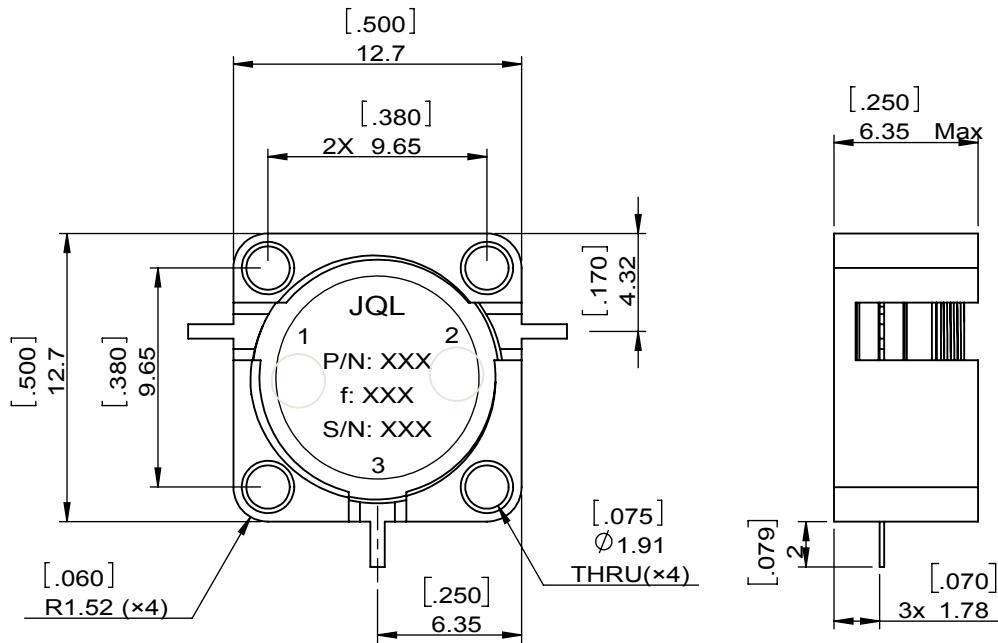

This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.