


UHF Band Coaxial Circulator

JCC0406T0430N25U

Description:

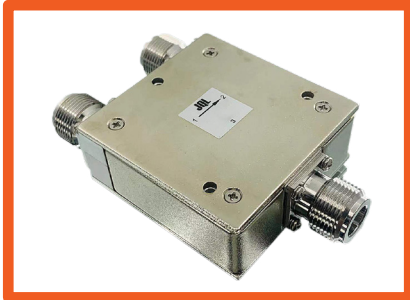


JCC0406T0430 is a high power co-axial circulator with N connectors. This special design can handle 250 watts CW power. This robust & stable design has excellent performance over the temperature range

Electrical Specification

Part Number	JCC0406T0430N25U
Frequency (GHz)	0.406~0.430
Insertion Loss(dB)MAX	0.25
Isolation(dB)MIN	25.0
Return Loss(dB)MIN	21.0
Operating Temperature	-30°C~60°C
Power FWD/REV/PK(Watt)	250/250/-


Outline

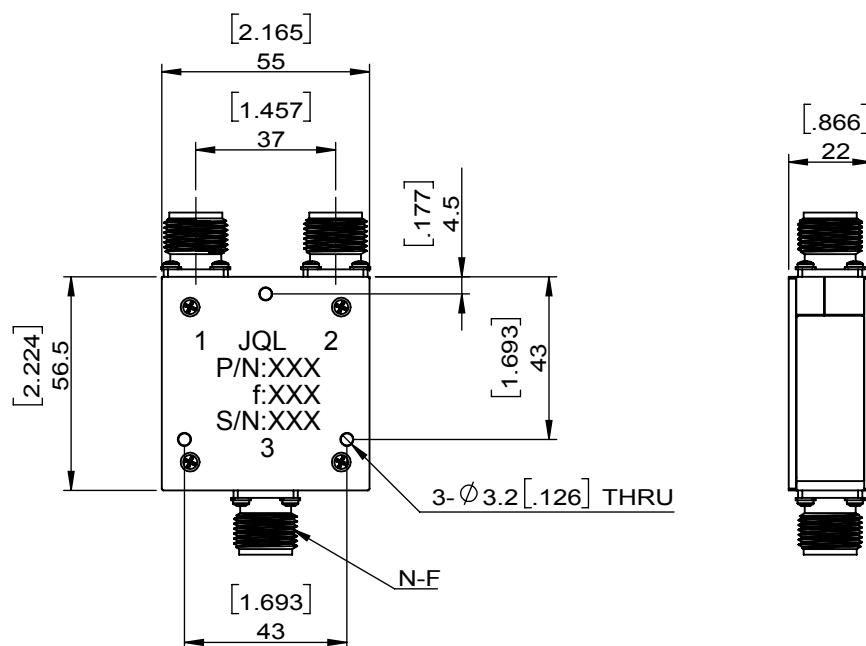

UHF Band Coaxial Circulator

JCC0406T0430N25U

Test Data

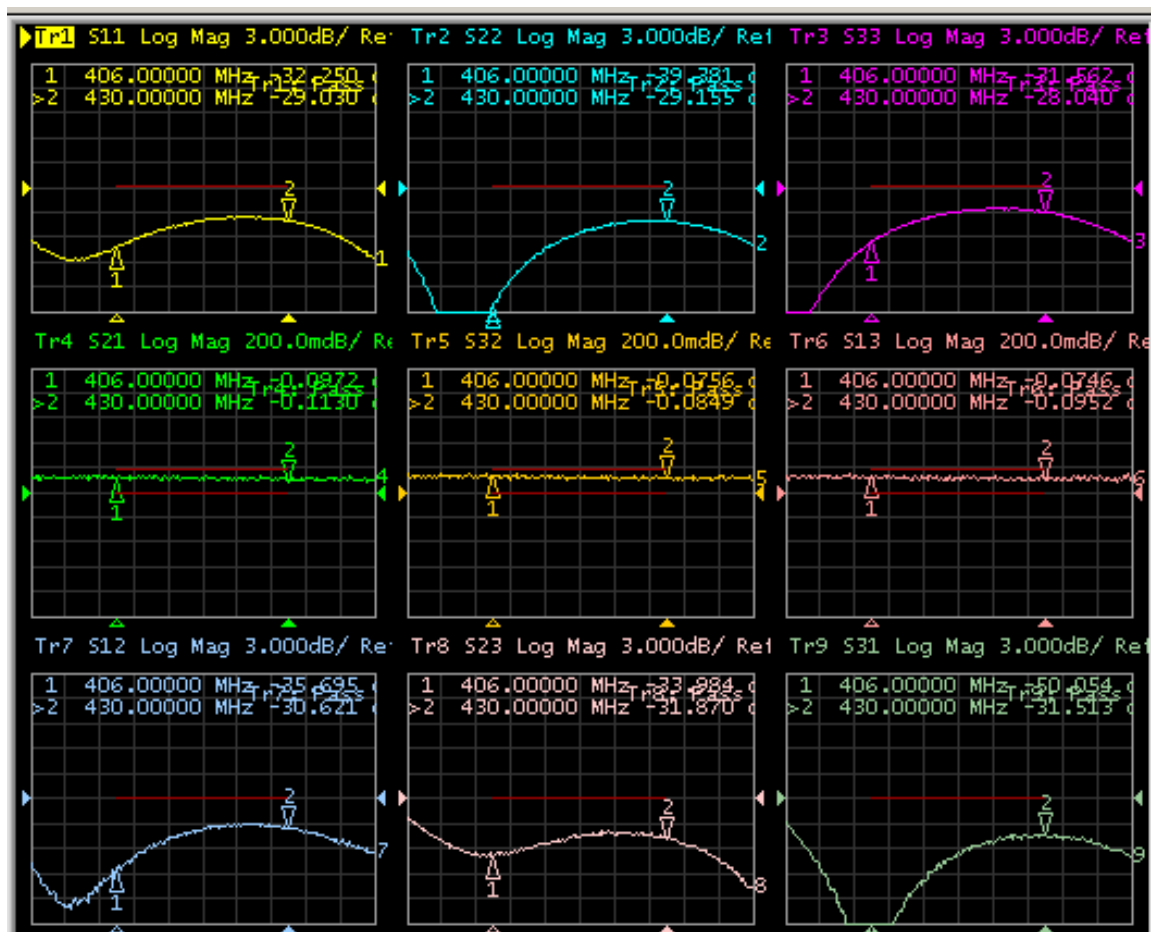

Features

- High Isolation
- Low insertion loss
- High power handling capability, 250 W CW
- RoHS & REACH Compliant

Applications

- Public Safety Infrastructure
- Power Amplifiers