



1		2		3		4		5		6	
Document No.	QR4-700-T-003					REV.	DESCRIPTION	REVISER	DATE	APPROVED	
REV.	A/0					0		YL.Chen	05.27.2022	HC.Qiu	

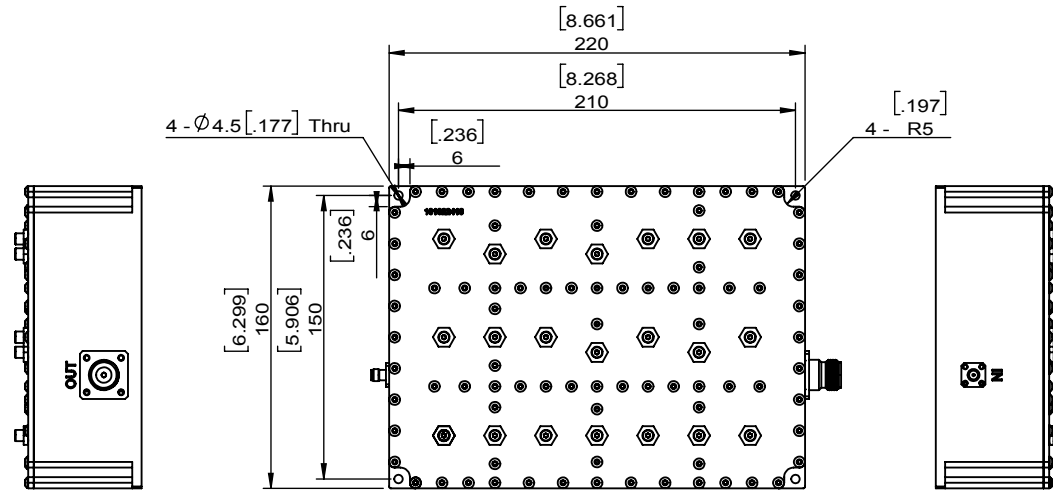

ITEM	SPECIFICATIONS		
Passband(MHz)	473.4375 ~ 473.6125	479.2375 ~ 479.9875	485.9750 ~ 486.9125
Insertion Loss(dB)	4.0 Max @ over temperature		
Return Loss(dB)	18 Min 16 Min @ over temperature		
Rejection(dB)	70Min@300 ~ 400MHz 40Min@470.4375 ~ 470.6125MHz 40Min@476.2375 ~ 476.9875MHz 40Min@482.9750 ~ 483.9125MHz 70Min@600MHz ~ 1GHz		
Power(dBm)	43 Average Power 53 Peak Power		
Temperature(°C)	-40~+85		
Humidity	0 ~ 95%		
Connector	IN:SMA Female ; OUT:N Female		
Note			

<b>JQL</b> JQL Technologies Corporation				
<b>MATERIAL:</b>		DWG NO: JFCB0473T0487NF-F		
<b>SURFACE TREATMENT:</b> Passivated Aluminum		DWG BY:	YL.Chen	05.27.2022
<b>DESCRIPTION:</b> Filter		CHK'D BY:		SCALE 1:4
		APPV'D BY:		
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First: 
				A4

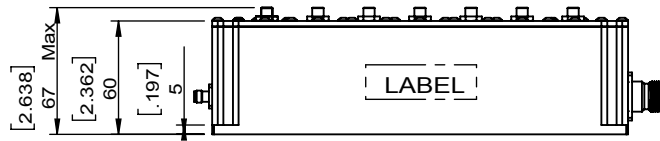

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.