
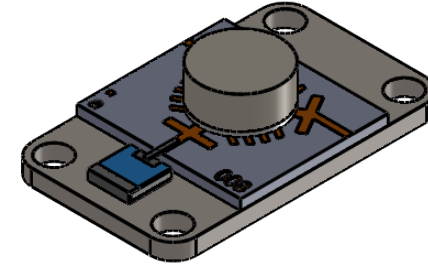


1		2		3		4		5		6			
Document No.	QR4-700-T-003	REV.	A/0	REV.	0	DESCRIPTION		REVISOR	X.S	DATE	09.01.2022	APPROVED	HC.Qiu

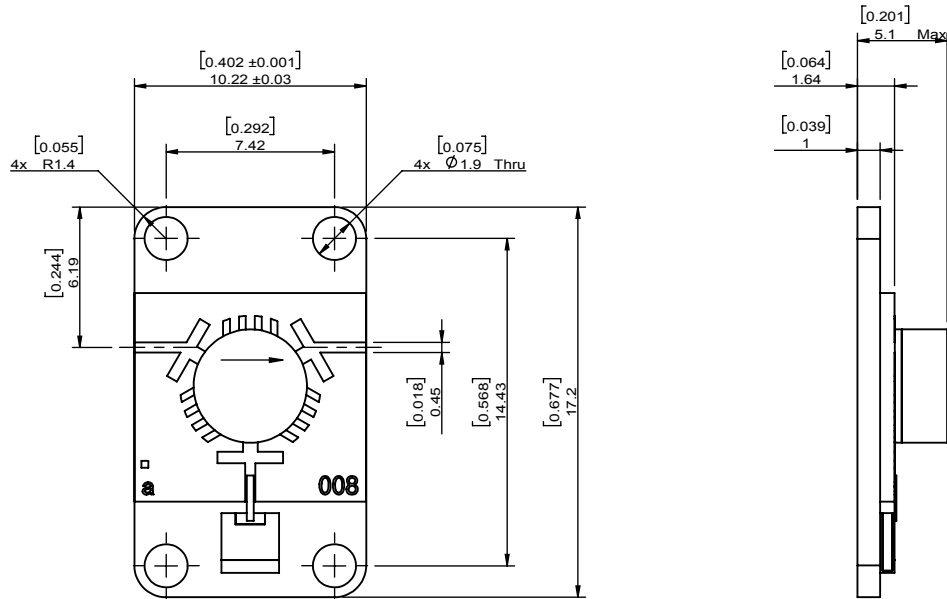

ITEM	SPEC
Frequency Rang(GHz)	6.500~9.600
Direction	CW
Insertion Loss(dB)	0.6 Max
Return Loss(dB)	19 Min
Isolation(dB)	16.6 Min
Power(W)	2
Operating Temperature(°C)	-40~+85
Additional Notes	-

Notes:

1. RoHS and REACH compliant.
2. Mounting: do not heat above 130°C.
3. Humidity 5 to 95% non-condensing.
4. Max temperature during welding process: +350°C @ 25 msec.



This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.

**JQL JQL Technologies Corporation**

<b>MATERIAL:</b> -	<b>DWG NO:</b> 2IMC-8.0-1-8.05BW38.51W1			
<b>SURFACE TREATMENT:</b> -	DWG BY:	X.S	09.01.2022	SCALE
	CHK'D BY:			
<b>DESCRIPTION:</b> MICROSTRIP ISOLATOR	APPV'D BY:			3:1
	Unit: mm[inch]	Tolerance: Liner: ±0.09 Anguar: ±0.5°	The First:	A4