

C Band Drop-In Circulator

E27051705785

Description:




E27051705785 is a drop-in circulator in the frequency 5.170~5.785 GHz. The device is extremely stable over the temperature range of -30°C to +85°C, with maximum insertion loss of 0.4dB and minimum return loss of 20 dB. This circulator can handle a CW Power FWD/REV/PK(Watt) of -/-/150

Electrical Specification

Part Number	E27051705785
Frequency (MHz)	5.170~5.785
Insertion Loss(dB)MAX	0.4
Isolation(dB)MIN	20.0
Return Loss(dB)MIN	20.0
Operating Temperature	-30°C to +85°C
Power FWD/REV/PK(Watt)	-/-/150
Tab(W×LG×THK)(mm[Inch])	1.0[.039]×2.5[0.098]×0.2[0.008]

Outline

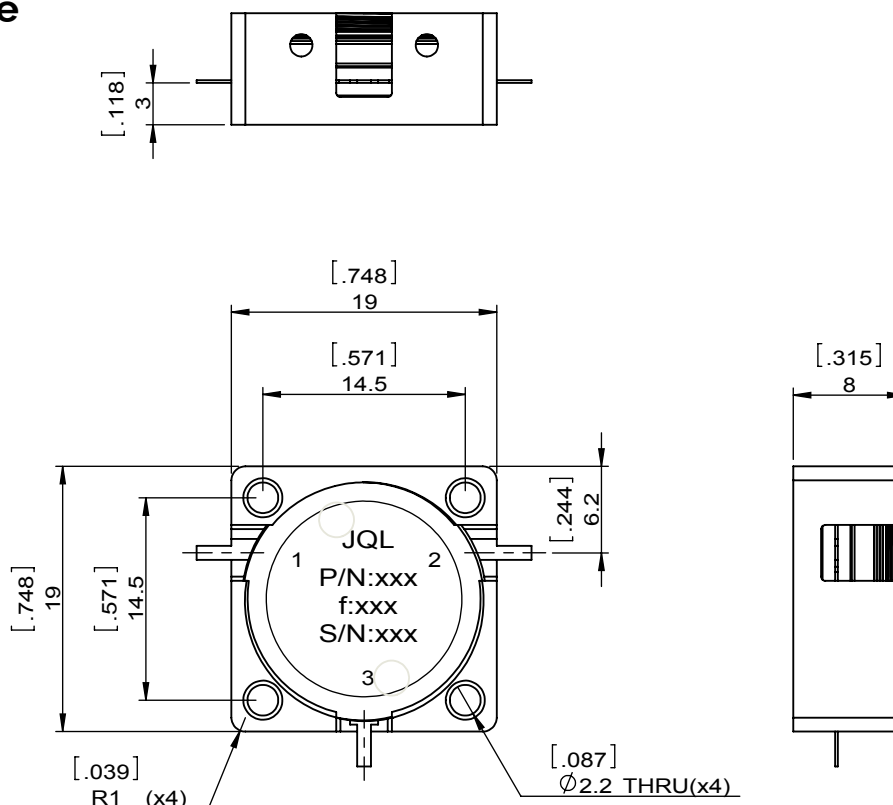

C Band Drop-In Circulator

E27051705785

Test Data

