

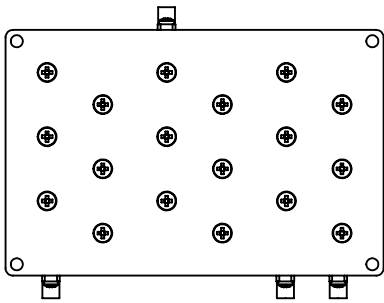
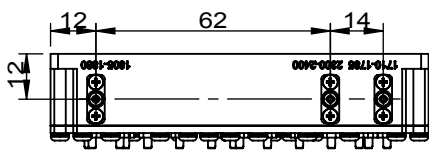



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISER	DATE	APPROVED			
		0		YL.Chen	09.21.2022	HC.Qiu					

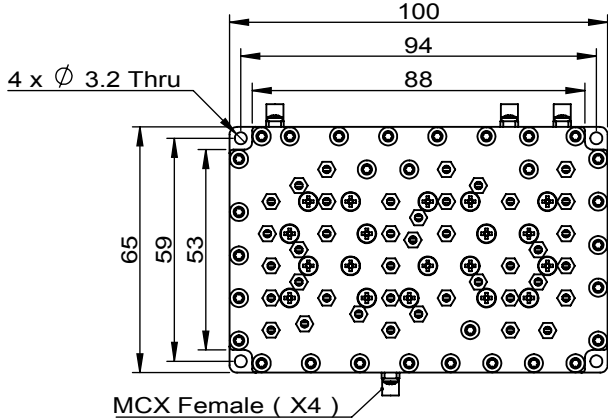

ITEM	SPECIFICATIONS		
Frequency(MHz)	1710-1785	1805-1880	2300-2400
Insertion Loss(dB)	2.5 Max		
Ripple(dB)	0.8 Max		
Return Loss(dB)	20 Min		
Rejection(dB)	50Min@DC-1600MHz 50Min@1805-3000MHz	50Min@DC-1785MHz 50Min@1920-3000MHz	50Min@DC-2200MHz 50Min@2496-3000MHz
Impedance(Ω)	50		
Power(W)	2 Avg ; 10 Peak		
PIM(dBc)	-145 @ 2x23dBm		
Temperature(°C)	-40~+85		
Humidity	0 ~ 95%		
Pressure(kPa)	86 ~ 106		
Connector	MCX Female		
Notes			

JQL JQL Technologies Corporation				
MATERIAL:		DWG NO: FBSF-3W171823DM04		
SURFACE TREATMENT: Silver Plating		DWG BY:	YL.Chen	09.21.2022
DESCRIPTION: Triplexer		CHK'D BY:		SCALE
		APP'VD BY:		1:2
		Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°	The First:
				A4

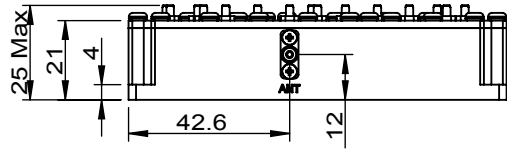

This document is the property of JQL Electronic Inc. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Electronic Inc.