
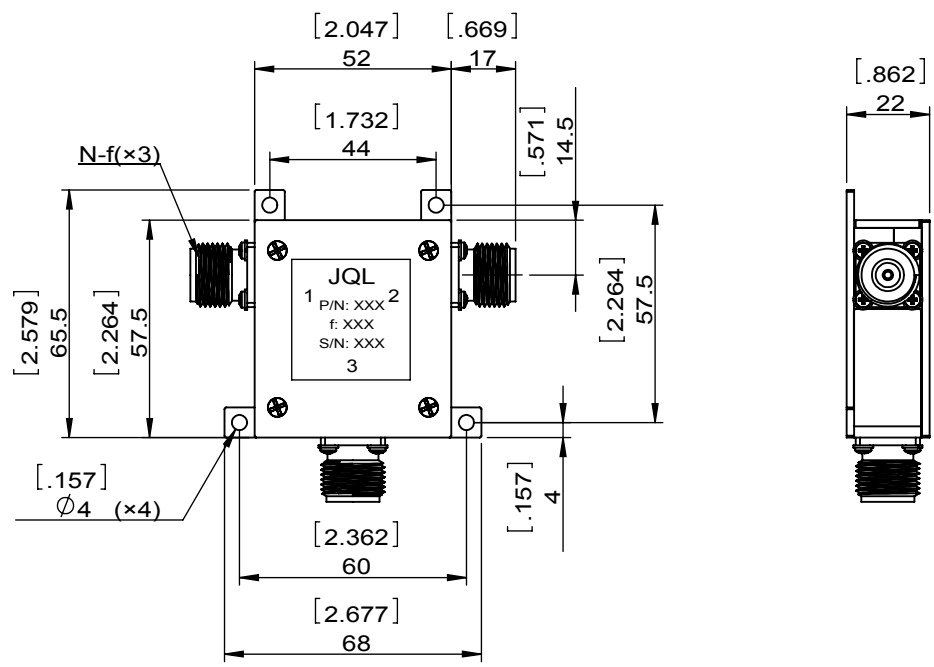



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
		0		J.Z	10.19.2022	HC.Qiu					

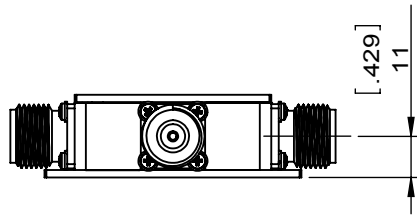

SPECIFICATIONS	
Part's Number	JCC0495T0505N5
Frequency(GHz)	0.495~0.505
Direction	-
Insertion Loss(dB)MAX	0.30
Isolation(dB)MIN	22.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	50/50/-
Operating Temperature(°C)	-30~+75
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

JQL JQL Technologies Corporation.

MATERIAL: STEEL	DWG NO: JCC0495T0505N5
SURFACE TREATMENT: NICKEL PLATING	DWG BY: J.Z CHK'D BY: APPV'D BY:
DESCRIPTION: COAXIAL CIRCULATOR	10.19.2022 SCALE: 1:2
Unit: mm[inch]	Tolerance: Liner: ±0.25 Anguar: ±0.5°
	The First:
	A4



This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.