

UHF Band Surface Mount Circulator

JCM0758T0803S60R

Description:




JCM0758T0803S60R is a surface mount circulator in the frequency 0.758~0.803 GHz. The device is extremely stable over the temperature range of -40°C to +100°C, with maximum insertion loss of 0.3 dB and minimum return loss of 20 dB. This circulator can handle a CW power of FWD/ REV 100/100W and PK handle of 600W

Electrical Specification

Part Number	JCM0758T0803S60R
Frequency (MHz)	0.758~0.803
Insertion Loss(dB)MAX	0.3
Isolation(dB)MIN	21.0
Return Loss(dB)MIN	20.0
Operating Temperature	-40°C~+100°C
Power FWD/REV/PK(Watt)	100/100/600


Outline

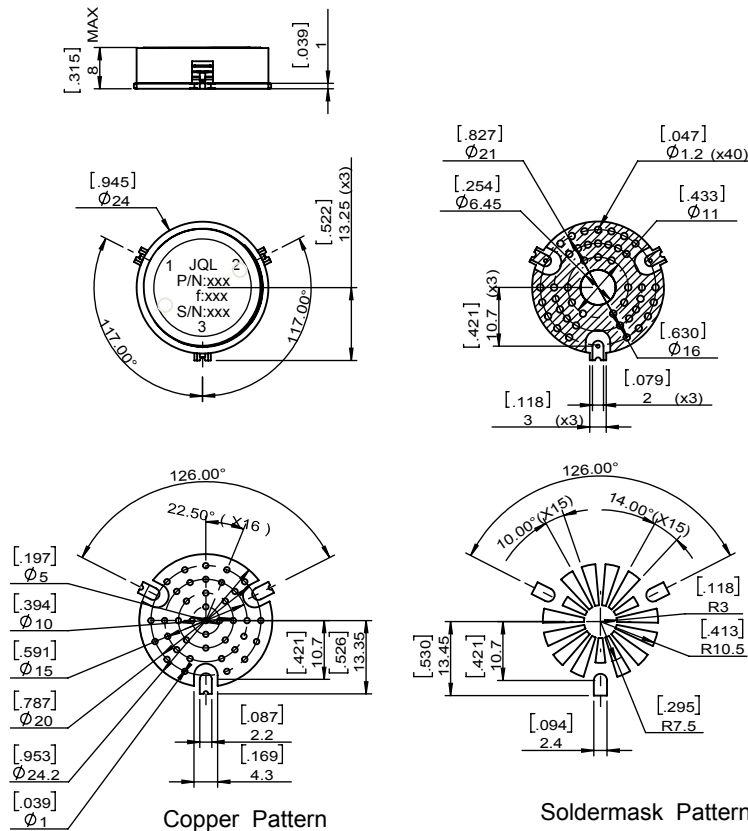

UHF Band Drop-In Circulator

JCM0758T0803S60R

Test Data

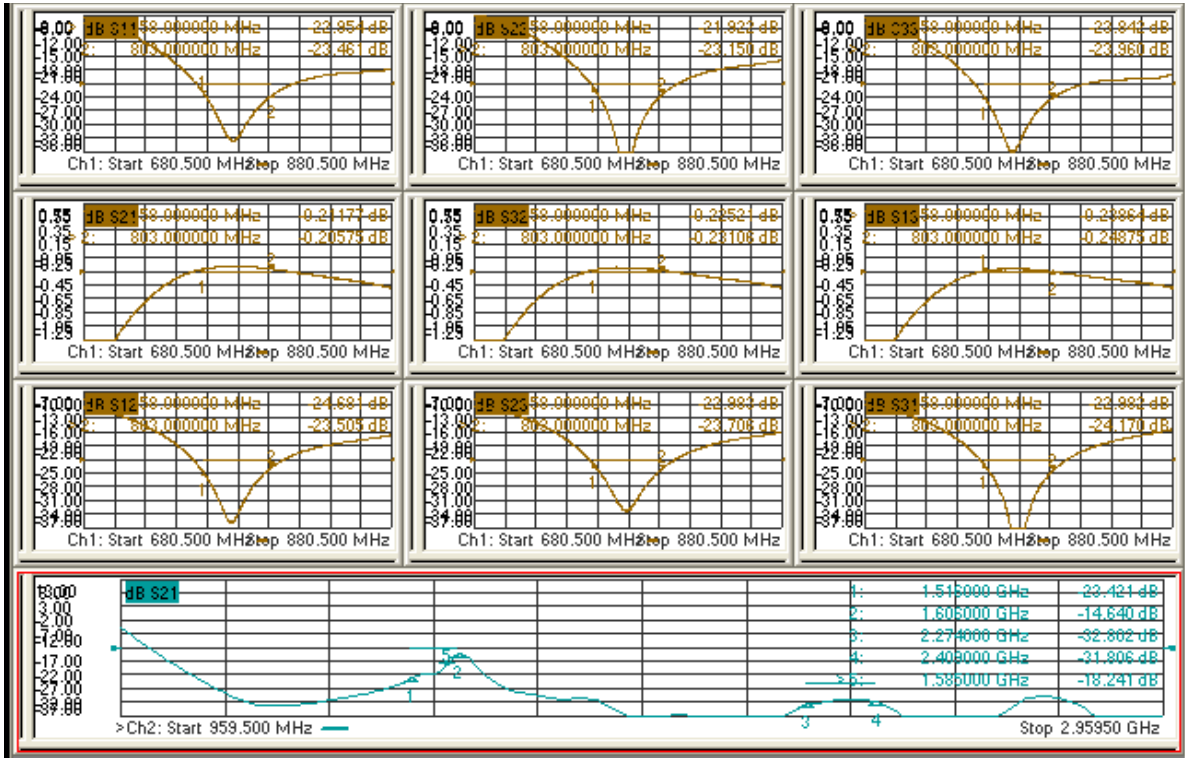

Application(s)

- Wireless