



1		2		3		4		5		6	
Document No.	QR4-700-T-003	REV.	A/0	REV.	DESCRIPTION	REVISOR	DATE	APPROVED			
				0		J.Z	06.17.2022	HC.Qiu			

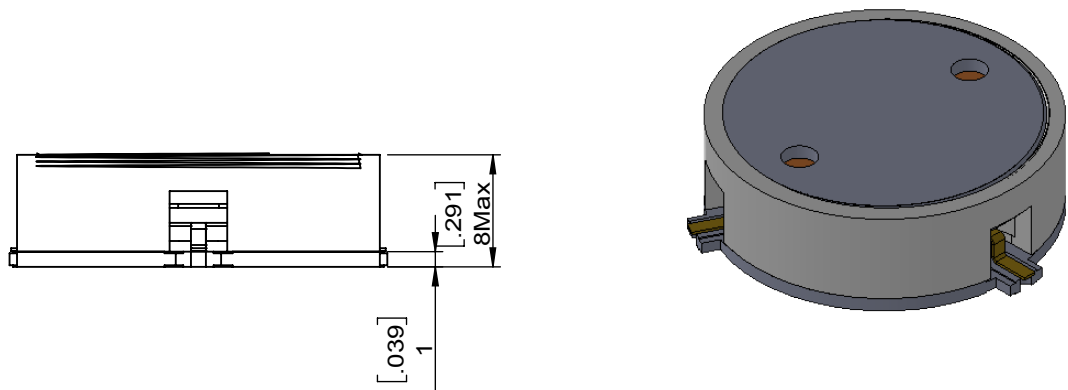

SPECIFICATIONS	
Part's Number	JCM1030T1090S5R
Frequency(GHz)	1.030~1.090
Direction	CW
Insertion Loss(dB)MAX	0.35
Isolation(dB)MIN	21.0
Return Loss(dB)MIN	20.0
3rd IMD(dBc)MAX	-
Power FWD/REV/PK(Watt)	5050/1000
Operating Temperature(°C)	-55~+50
Storage Temperature(°C)	-
2nd/3rd Harmonic(dBc)	-
Termination/Attenuator(Watt/dB)	-
Tab(W×LG×THK)(mm[Inch])	-
Additional Notes	-

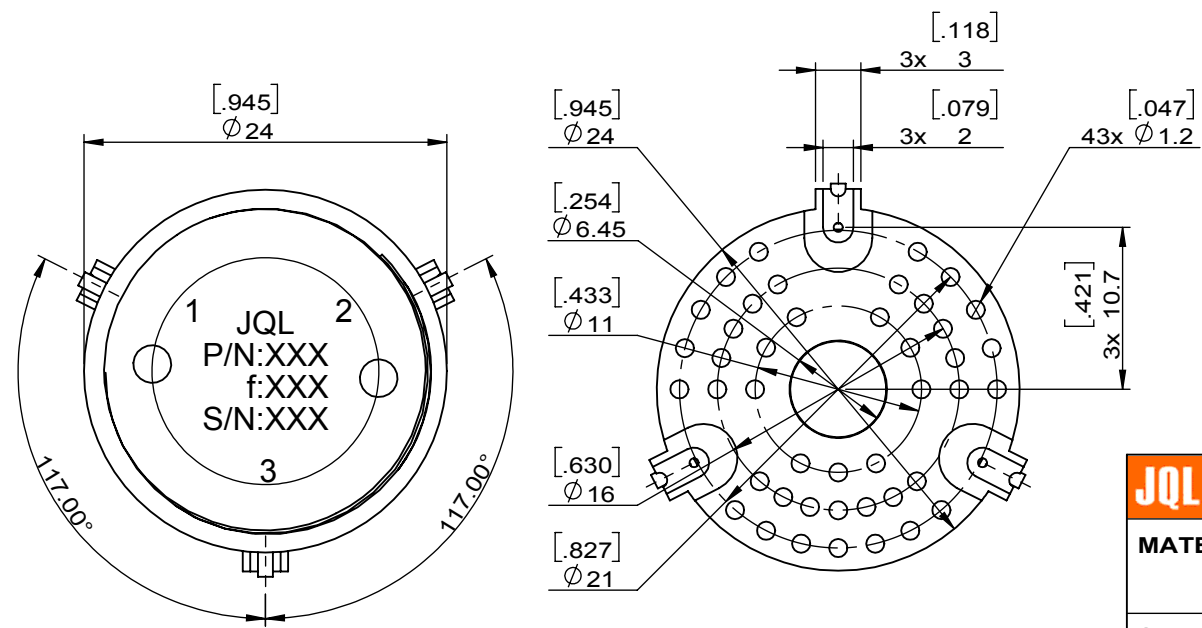

**JQL** JQL Technologies Corporation

<b>MATERIAL:</b> STEEL	<b>DWG NO:</b> JCM1030T1090S5R			
<b>SURFACE TREATMENT:</b> NICKEL PLATING	DWG BY:	J.Z	06.17.2022	SCALE
	CHK'D BY:			
<b>DESCRIPTION:</b> SMT CIRCULATOR	APP'V'D BY:			2:1
	Unit:	Tolerance:	The First:	A4
	mm[inch]	Liner: ±0.25 Anguar: ±0.5°		



This document is the property of JQL Technologies Corporation. It cannot be copied, duplicated, used for manufacturing purposes or communicated to third party as a whole or partly, without the written consent of JQL Technologies Corporation.