

# S Band Surface Mount Circulator

## JCM2400T2500PV2

### Description:




JCM2400T2500PV2 is a high power surface mount circulator with robust pin design for perfect contact with the PCB and for high volume production.

### Electrical Specification

| Part Number            | JCM2400T2500PV2 |
|------------------------|-----------------|
| Frequency (GHz)        | 2.400~2.500     |
| Insertion Loss(dB)MAX  | 0.3             |
| Isolation(dB)MIN       | 21.0            |
| Return Loss(dB)MIN     | 19.0            |
| Operating Temperature  | -40°C~90°C      |
| Power FWD/REV/PK(Watt) | 20/20/-         |


### Outline

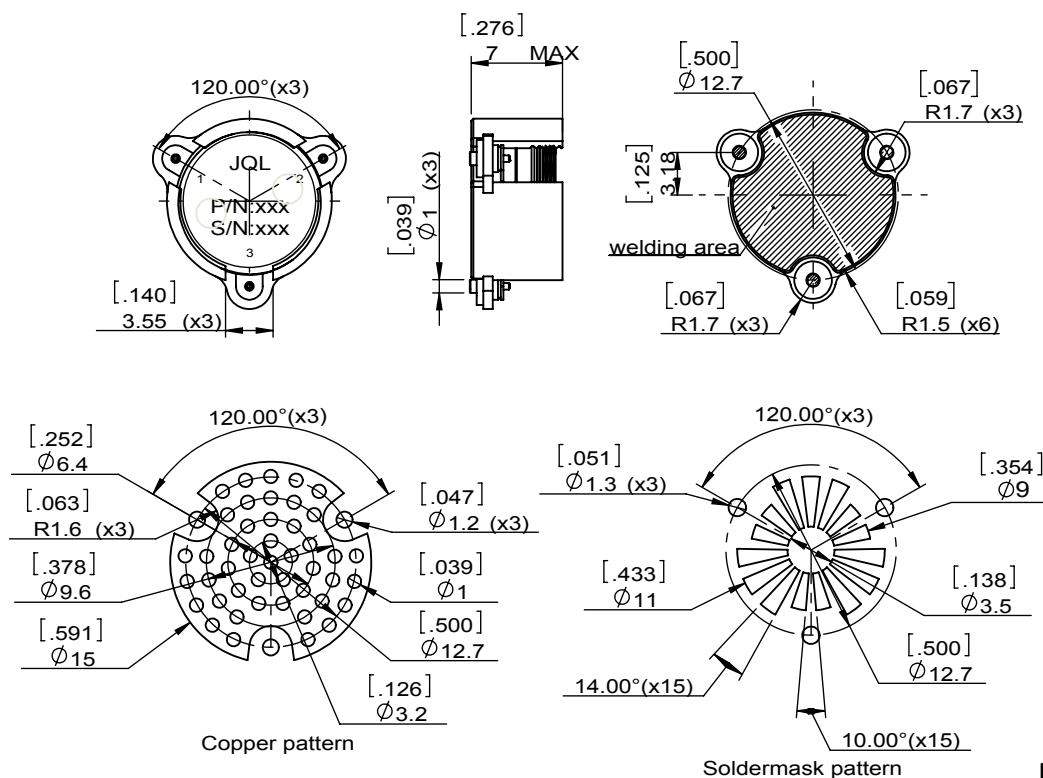

# S Band Surface Mount Circulator

## JCM2400T2500PV2

### Test Data

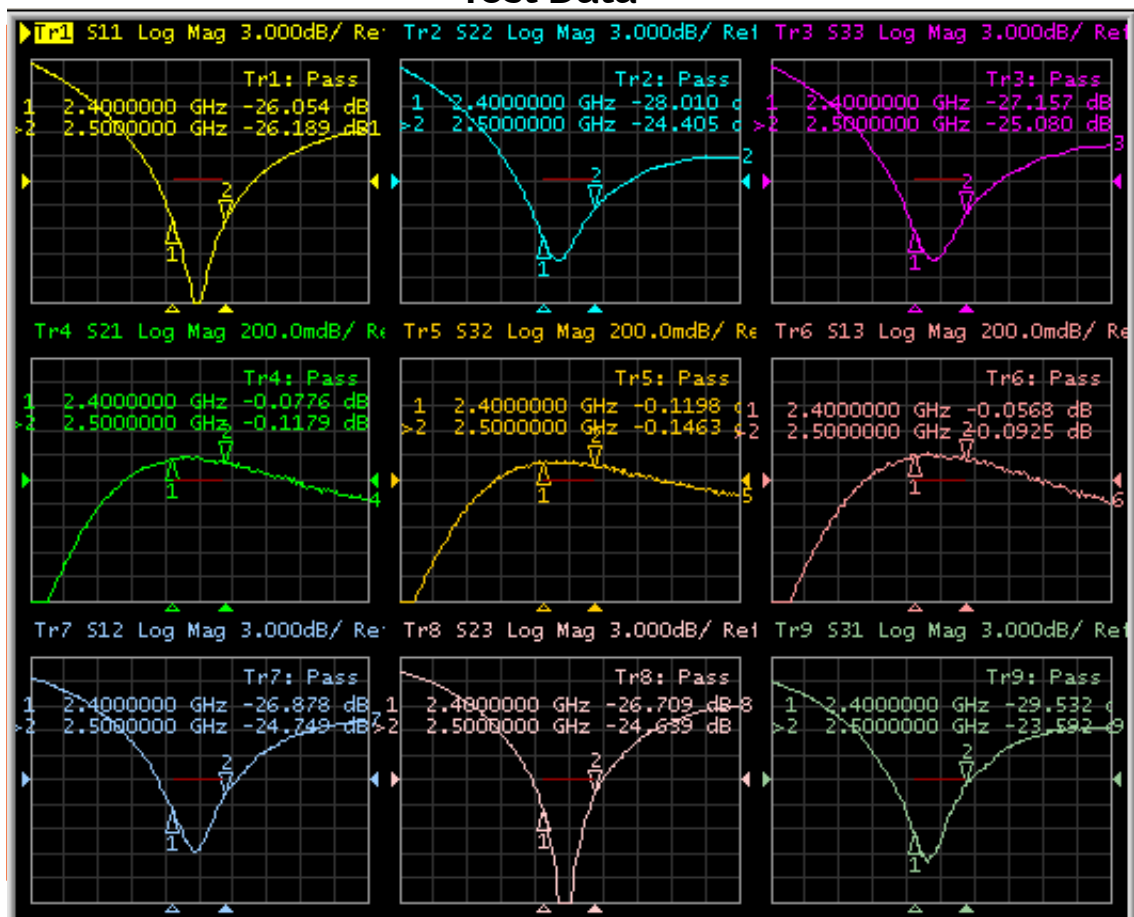

### Features

- High power handling capability
- Temperature stability
- Low insertion loss
- Ideal for pick & place production
- Tape & Reel packaging available

### Applications

- Power amplifiers