

S Band Surface Mount Circulator

JCM2515T2675LM2RC

Description:




JCM2515T2675LM2RC is a surface mount circulator in the frequency 2.515~2.675 GHz. The device is extremely stable over the temperature range of -40°C to +85°C, with maximum insertion loss of 0.50dB and minimum return loss of 18.0dB. It can handle a CCW Power FWD/REV/PK(Watt) of 20/20/50

Electrical Specification

Part Number	JCM2515T2675LM2RC
Frequency (GHz)	2.515~2.675
Insertion Loss(dB)MAX	0.50
Isolation(dB)MIN	18.0
Return Loss(dB)MIN	18.0
Operating Temperature	-40°C~85°C
Power FWD/REV/PK(Watt)	20/20/50

Outline

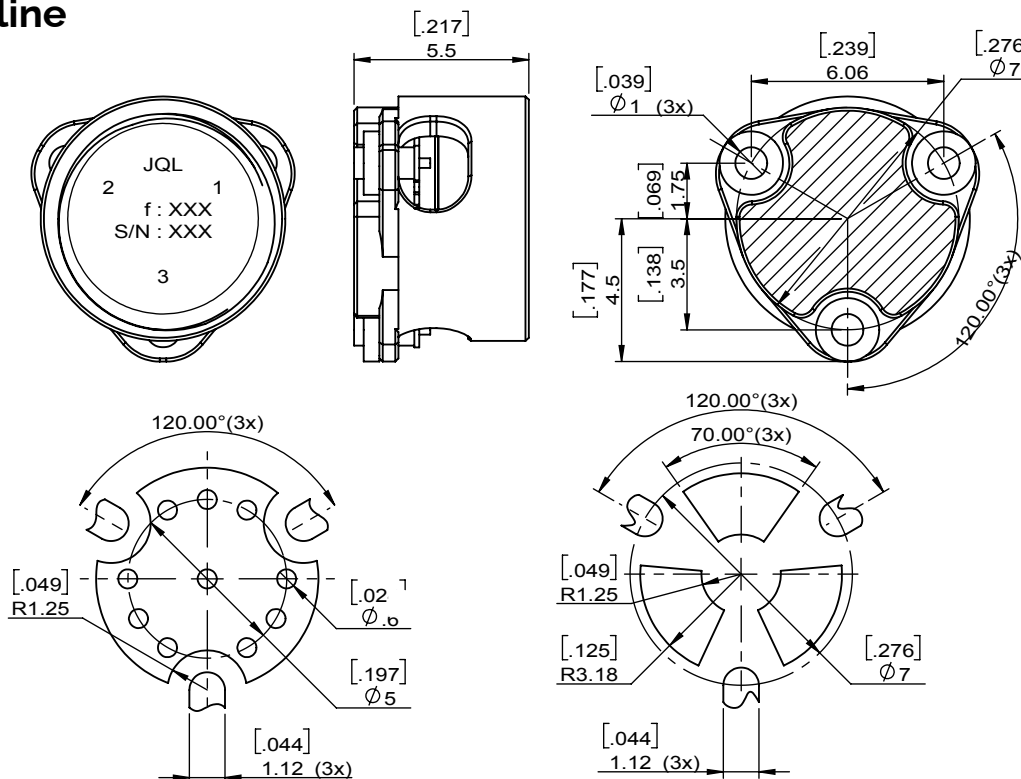

Copper Pattern

Soldermask Pattern

S Band Surface Mount Circulator

JCM2515T2675LM2RC

Test Data

